



**Applications:**

Facade, Wall Washing, Landscape lighting, Poster board lighting, Building lighting.

**Features**

- Rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection.
- Lumen output 1500-5400lm with efficacy up to 120lm/W
- Installation for option: 1/2" knuckle mount for 15W, 30W and 45W fixtures or trunnion mount for 30W and 40W fixtures.
- Wide Flood beam spread 7H x 7V
- Long life LEDs lasting up to 50,000hours
- Fixtures are suitable for use in ambient from -40°C to 45 °C ( -40°F ~ 113 °F )
- UL wet location listed and DLC listed



**ELECTRICAL DATA**

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	430	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11
1	1100	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16

**PERFORMANCE DATA**

SYSTEM WATTS	VOLTAGE	DIST.TYPE	3000K(70CRI)		5000K(70CRI)	
			BRIGHTNESS (lumens)	EFFICACY (lumens per Watt)	BRIGHTNESS (lumens)	EFFICACY (lumens per Watt)
15W	120-277V	7Hx7V	1500lm	100 lm/W	1500lm	100 lm/W
30W	120-277V	7Hx7V	2850lm	95 lm/W	3000lm	100 lm/W
45W	120-277V	7Hx7V	5130lm	114 lm/W	5400lm	120 lm/W

## ORDERING GUIDE


Example: NUR-FL-MINI-15W-3000K-KM

Fixture Type	Style	Wattage	CCT	Mounting
FL Flood Light	MINI	15W 15W 30W 30W 45W 45W	30K 3000K 50K 5000K	KN Knuckle Mount TR Trunion Mount

## DIMENSIONS


unit: mm/inch

### 15W (Knuckle Mount)




Net Weight:  
0.939lb

### 30W (Knuckle Mount)




Net Weight:  
1.887lb

### 30W (Trunion Mount)

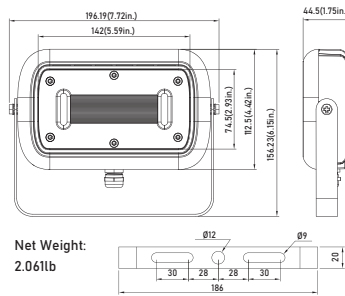


Net Weight:  
2.061lb

### 45W (Knuckle Mount)

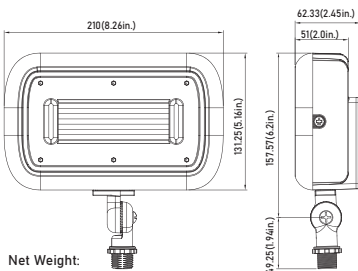

Net Weight:  
3.893lb

### 45W (Trunion Mount)

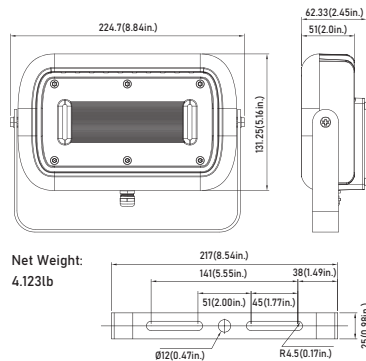

Net Weight:  
4.123lb

## MOUNTING

### 1/2" Knuckle Mount

Die-cast aluminum knuckle provides flexibility in mounting from a variety of areas.






### Trunion Mount

Die-cast aluminum trunion is easily adapted to many surfaces and allows easy fixture aiming angles.



PHOTOMETRICS



DLC Model NO.

SYSTEM WATTS	VOLTAGE	CCT	DLC NO.	DLC Classification
15W	120-277V	3000K	FD15W27V30KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard
		5000K	FD15W27V50KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard
30W	120-277V	3000K	FD30W27V30KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard
		5000K	FD30W27V50KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard
45W	120-277V	3000K	FD45W27V30KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard
		5000K	FD45W27V50KB[D,B,W,SG]B77[KN,TR][Y,Blank]	Standard