

## BOLLARD LIGHT

### Features:

- Dark bronze polyester powder-coat finish.
- Round appearance for good decorative effect, sized in 3.5ft height.
- Robust ground cage pre-buried installation.
- Efficacy higher than 115 lm/W with zero uplight while consumes 26W.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming.
- Operating temperature is -40°F to 113°F(-40°C to 40°C).
- Projected over 50,000 hrs life span.



### Technical Specifications:


- Wattage: 26W
- Input Voltage: 120-277V
- Lumen Output: 3000lm
- Lumens Per Watt: 115lm/W
- Color Temperature: 4000K
- CRI: >80
- Life Span: 50,000 hrs.
- Warranty: 5 Years

### Applications:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.



## Dimensions:

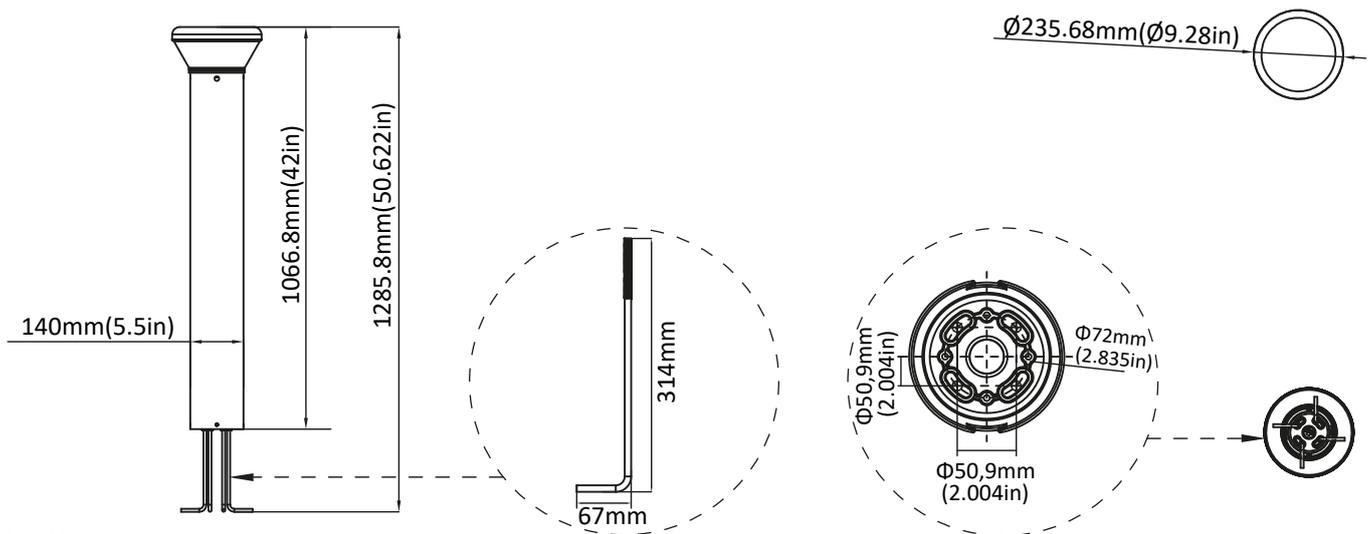

Net Weight:  
26W: 12.136lbs

## ELECTRICAL DATA

Number Of Drivers	Current Drive (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09



**DLC Model No.**

System Watts	Voltage	CCT	DLC No.	DLC Classification
26W	120-277V	4000K	MBL0126W27V40K[D,B,W][Blank,B][Blank,A-Z,a-z,0-9]	Premium

**ORDERING GUIDE** Example: NUR-Bollard-26W-4000K

Fixture Type <input type="text"/>	Wattage <input type="text"/>	Color Temperature <input type="text"/>
Bollard	26W	4000K