

# RGB+CCT GU10 SMART BULB

## DESCRIPTION:

ORA RGB+CCT GU10 smart bulbs offer advanced control and synchronization capabilities. A single bulb can transmit signals from the remote control to others within a 98.4 ft radius, enabling limitless control distance as long as a bulb is within range. This interconnectedness allows for seamless synchronization of multiple bulbs, even if they are started at different times. As long as they are controlled by the same remote and are within 98.4 ft meters of each other, they will work harmoniously.



## FEATURES:


- 16 Million Color Combinations
- Wireless range of up to 98.4 ft without obstruction
- Adjustable color temperature from 2700K to 6500K
- Compatible with ORA SMART GATEWAY for smartphone control
- App is available for iOS and Android
- Smooth Dimming and Color Blending capabilities
- Compatible with third-party voice control (requires ORA Wi-Fi Gateway)




## APPLICATIONS:

- Offices
- Homes
- Retail Stores
- Hotels

## DIMENSIONS:

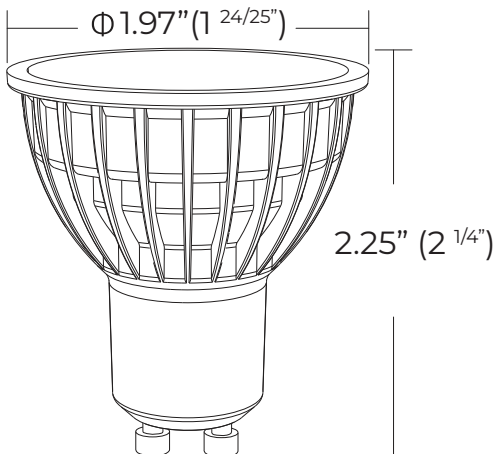


## COLOR TEMPERATURE:

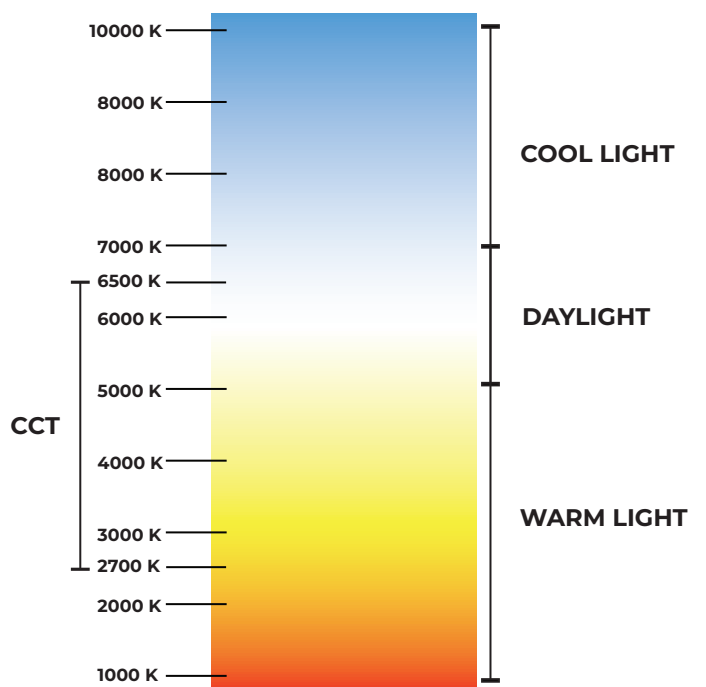

## TECHNICAL SPECIFICATIONS:

|                     |                    |
|---------------------|--------------------|
| Model No.           | MILI-GU10-4W-RGBCB |
| Power               | 4W                 |
| Base Type           | GU10               |
| Voltage             | MILI-GU10-4W-RGBCB |
| Rated Current       | 0.07A              |
| Lumens              | 320LM              |
| Lumens Efficiency   | 80LM/W             |
| Working Temperature | 14°F - 104°F       |
| Color Temperature   | 2700K~ 6500K       |
| CRI                 | >80                |
| PF                  | 0.5                |
| Beam Angle          | 25°                |
| RF                  | 2.4GHz             |
| Control Distance    | 98.4 ft            |

## LINKING CODE INSTRUCTIONS



1


Switch off light, after 10 seconds then switch on again.

Link / Unlink button



2

Short press " | " button 3 times within 3 seconds when light on.




3

Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.  
(Note: Light that have linked can't link again)

## UNLINKING CODE INSTRUCTIONS




1

Switch off light, after 10 seconds then switch on again.



2

Short press " | " button 5 times within 3 seconds when light on.



3

Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again.  
(Note: Light haven't linked that don't need to unlink)

## THE MODE OF “DO NOT DISTURB”

It can be easily activated or deactivated using a remote control.

**Activate "Do Not Disturb" mode (widely used in areas with frequent power outages to conserve energy).**

Press the “OFF” button three times within three seconds, then press the “ON” button three times. The activation is successful when the LED light flashes quickly four times.

**Attention:** "Do Not Disturb" Mode Activated

### 1. When the light is OFF:

For instance, if the light is turned off using an app or remote, it will turn ON after the power is turned OFF and ON once.

### 2. When the light is ON:


Turning the power OFF and ON will switch the light OFF. To reactivate the light, the user must toggle the power OFF and ON twice or use the app/remote to turn the light ON.

### To deactivate "Do Not Disturb" mode:

Press the "ON" button three times within three seconds, followed by pressing the "OFF" button three times. Deactivation is confirmed when the LED light flashes slowly four times. Note: Once "Do Not Disturb" mode is turned off, the light will always remain ON when the power is toggled OFF and ON once.

## SIGNAL MESH:

ORA RGB+CCT MR16 smart bulbs offer seamless control and synchronization. One bulb can transmit signals from the remote control to others within a 98.4 ft radius, allowing for limitless control distance as long as there is a bulb within range. Additionally, multiple bulbs can work synchronously, even when started at different times, as long as they are controlled by the same remote and are within 98.4 ft of each other.

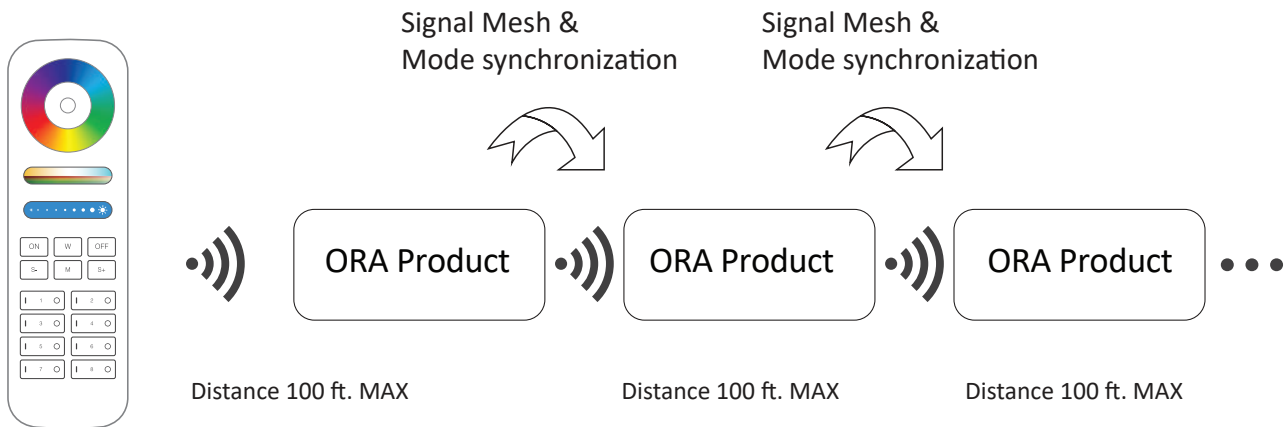


## COMPATIBLE WITH THESE REMOTE CONTROLS (PURCHASED SEPARATELY)

**ORA RGB+CCT 8 Zone Remote**  
SKU: MILI-REM-RGBWW-8Z

**ORA RGB+CCT 4 Zone Remote**  
SKU: MILI-REM-RGBWW

**ORA 4 Zone RGB+CCT Panel Remote**  
SKU: MILI-REM-RGBWW-WALL-4Z



**RGB+CCT 8 Zone Touch Panel Wall Remote**  
SKU: MILI-REM-RGBWW-WALL-8Z



## ATTENTION:

1. When installing the light fixtures, please switch off the power to ensure safety.
2. Please check whether the input voltage supply is in accordance with the lighting fixtures.
3. Do not open / disassemble the fixture.
4. Not for use in wet locations. Use caution when installing.
5. Avoid using the light in areas with extensive metal structures or strong electromagnetic fields. Such environments can significantly reduce the remote control distance.
6. NON-DIMMABLE. NOT FOR USE WITH ANY WALL DIMMER



Made in China