





FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- Input Voltage: 120/277V
- Power consumption: 4W max.
- Output: 1W max.
- 1.2V Nickel Cadmium Battery
- Charging time: 24 hours
- Discharge time: 90 minutes
- Operating temperature: 0°C~40°C
- Dimension: 295*207.8*116mm

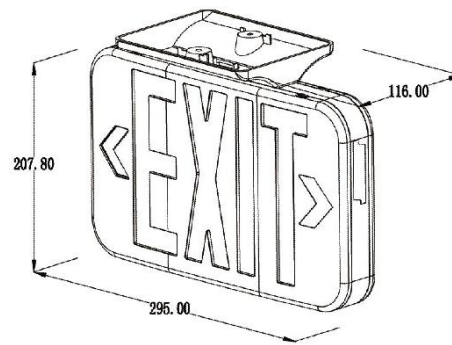

Optional Color

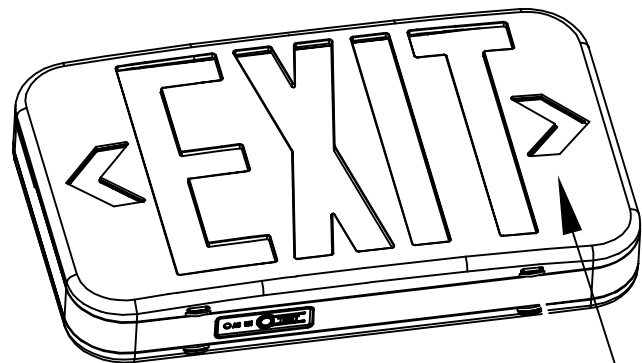

Use Provided Insert To Cover Unused Directional Arrow if Needed



ORDER INFORMATION

Picture	Model	Voltage	Color	Discharge time	Certificate
	CR- 7037R	120/277V	RED	90 minutes	UL, CUL
	CR- 7037G	120/277V	GREEN	90 minutes	UL, CUL