



Overview



This LED Slim Panel Light can perfectly replace traditional downlight. It provides uniform, smooth, and low glare lighting that is perfect for many applications.

Applications

Hallways, Living Room, Bedroom, Kitchen, Meeting Rooms, Common Areas

Key Features

- Ultra thin design, only 13mm thick
- High brightness SMD2835 LEDs
- Stable constant current
- Homogeneous light emission
- Constant 12V DC voltage
- Mercury and UV Free Lighting
- 30,000 Hour Lifespan
- Aluminum Frame, PMMA Cover
- Dimmable
- Flicker-Free Lighting
- 120° Beam Angle
- CRI >90
- Working Temp. -20°C to 65°C
- Uses just 0.2W per LED
- IP42
- 3 Year Warranty



Model	Shape	Power	Lumens	CCT	LED Qty	Unit Size	Hole Size
SLS-4	Square	6W	320 LM	3,000K	30	120 x 120 x 13mm	105 x 105mm
SLS-6		12W	730 LM		60	175 x 175 x 13mm	155 x 155mm
SLS-8		15W	1,260 LM		90	225 x 225 x 13mm	203 x 203mm
SLS-10		24W	1,400 LM		114	300 x 300 x 13mm	275 x 275mm
SLR-4	Round	6W	320 LM	6,000K	30	120 x 13mm	Ø 105mm
SLR-6		12W	730 LM		60	175 x 13mm	Ø 155mm
SLR-8		15W	1,260 LM		90	225 x 13mm	Ø 203mm
SLR-10		24W	1,400 LM		114	300 x 13mm	Ø 275mm



Thick Aluminum Housing



High Brightness SMD2835



Advanced Heat Dissipation Design








Strong Spring Fastener



Strain Relief O-Ring



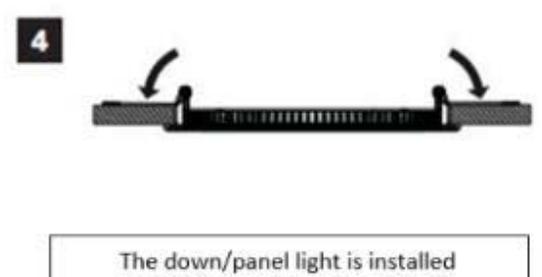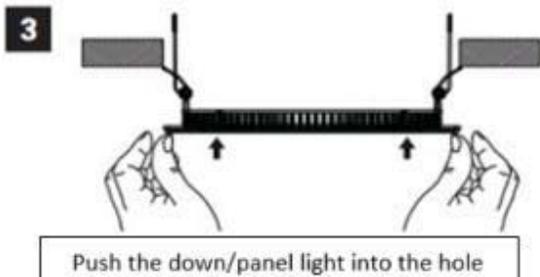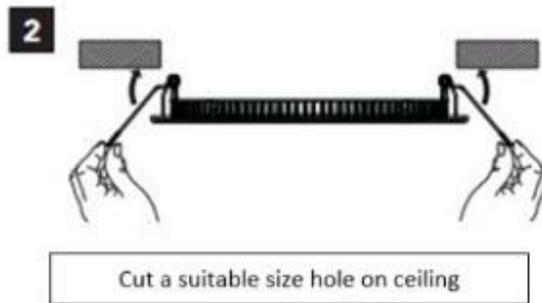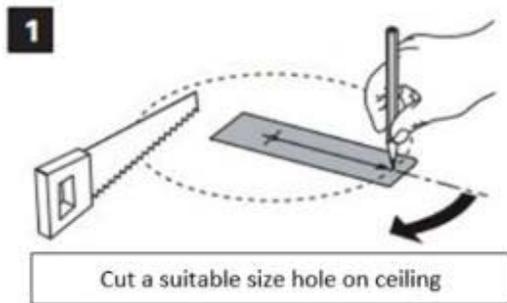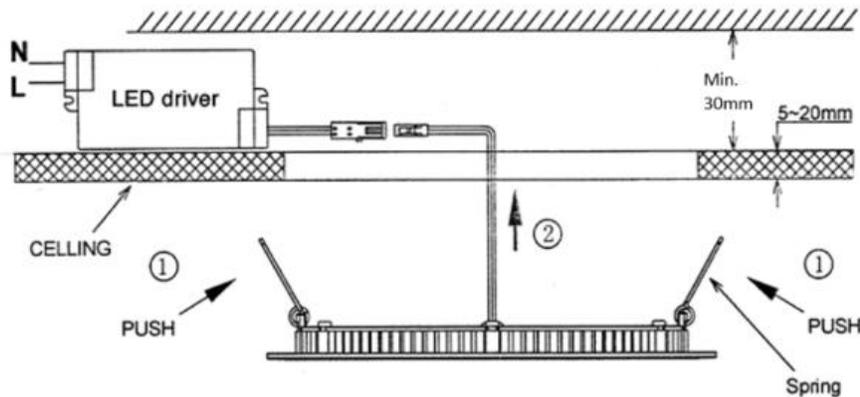

Notice:

④

1. Please read the specification first, to make sure the service environment matches the condition in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your

personal safety.

5. Preliminarily estimate required quantity of LED panel lights, then according to the power rating of panel light to figure out the total power and design power supply plan.

6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.

7. If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.