









ORA RGB+CCT MR16 SMART BULB

DISCRIPTION:


ORA RGB+CCT MR16 smart bulbs offer a wide range of colors and adjustable color temperatures, ranging from 2700K to 6500K. These bulbs can be controlled remotely, by voice command, or through a smartphone app, providing flexibility and customization. The bulb features an acrylic cover with auto-transmitting and auto-synchronizing functions. This 4W bulb offers a 25-degree beam angle. It is ideal for retail spaces and can highlight display cases, gallery artwork, and other areas requiring directional lighting.




FEATURES:

-  **RGB+CCT:**
Offers a wide range of colors and color temperatures
-  **Dimming and Saturation:**
Adjusts brightness and color saturation. 2700K - 6500K
-  **Remote control:**
Easily control the light from a distance of 98.4 ft
-  **Smartphone app control:**
Manage settings using a smartphone app
-  **Voice Control:**
Control the light with your voice
-  **2.4G RF Wireless:**
Connects to your Wi-Fi network
-  **Signal Transmission and Modes Synchronization:**
Ensures consistent and synchronized operation
-  **DMX512 Controllable:**
Compatible with professional lighting control systems

COLOR TEMPERATURE:

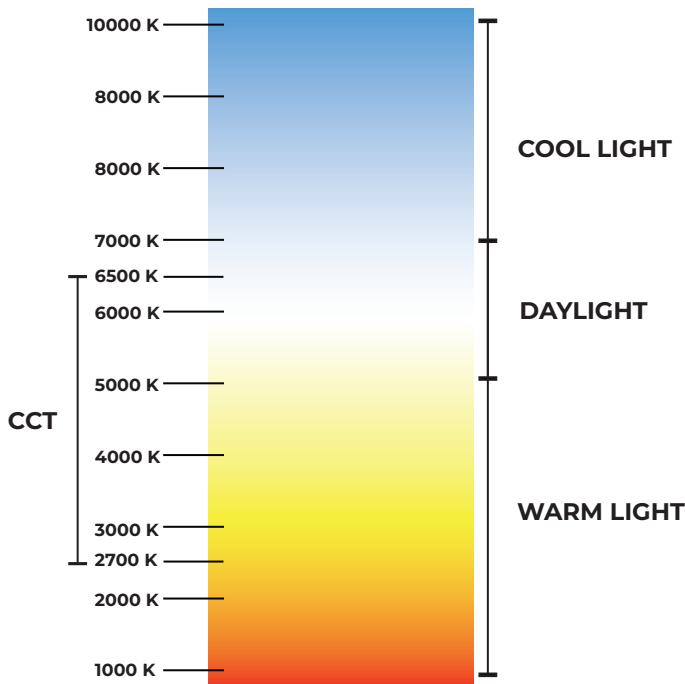

DIMENSIONS:

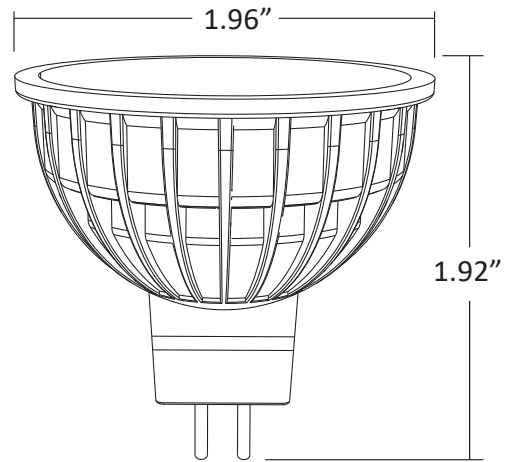


TECHNICAL SPECIFICATIONS:

Model No	MILI-MR16-4W-RGBCB
Input Voltage	AC/DC12V
Power	4W
Working Temperature	-4°F~140°F
Color Temperature	2700K~ 6500K
Lumens	400LM
Light Efficiency	100LM/W
Lifespan	50000 Hours
CRI	>80
Beam Angle	25°
RF	2.4GHz
Control Distance	100 FT MAX

INSTRUCTIONS:

Step 1

Put the light bulb in the suitable lighting fixture.

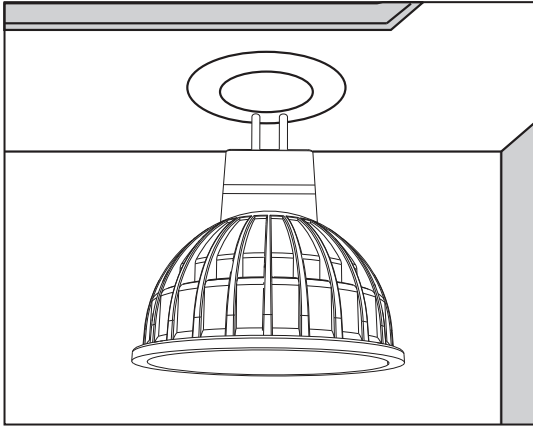

⚠ NOTE:


For lamps with a weight significantly higher than that of the lamps for which they are a replacement, attention should be drawn to the fact that the increased weight may reduce the mechanical stability of certain luminaires and lamp holders and may impair contact-making and lamp retention.

LINKING CODE INSTRUCTIONS



Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

UNLINKING CODE INSTRUCTIONS

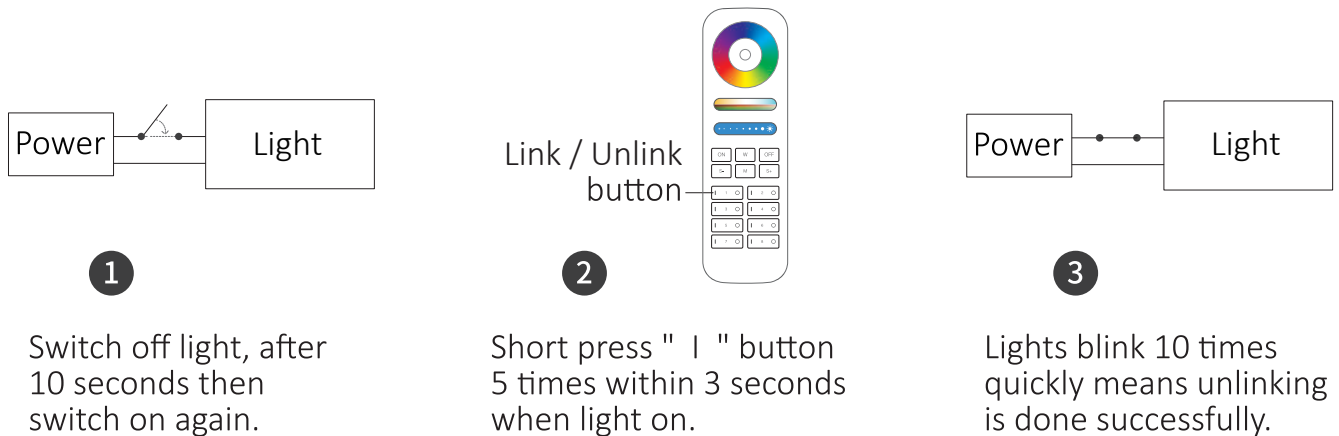

1

Switch off light, after 10 seconds then switch on again.

2

Short press " | " button 5 times within 3 seconds when light on.

3

Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again. (Note: Light haven't linked that don't need to unlink)

THE MODE OF "DO NOT DISTURB"

It can be easily activated or deactivated using a remote control.

Activate "Do Not Disturb" mode (widely used in areas with frequent power outages to conserve energy).

Press the "OFF" button three times within three seconds, then press the "ON" button three times. The activation is successful when the LED light flashes quickly four times.

Attention: "Do Not Disturb" Mode Activated

1. When the light is OFF:

For instance, if the light is turned off using an app or remote, it will turn ON after the power is turned OFF and ON once.

2. When the light is ON:

Turning the power OFF and ON will switch the light OFF. To reactivate the light, the user must toggle the power OFF and ON twice or use the app/remote to turn the light ON.

To deactivate "Do Not Disturb" mode:

Press the "ON" button three times within three seconds, followed by pressing the "OFF" button three times. Deactivation is confirmed when the LED light flashes slowly four times.


Note: Once "Do Not Disturb" mode is turned off, the light will always remain ON when the power is toggled OFF and ON once.

COMPATIBLE WITH THESE REMOTE CONTROLS (PURCHASED SEPARATELY)


ORA RGB+CCT 8 Zone Remote
SKU: MILI-REM-RGBWW-8Z



ORA RGB+CCT 4 Zone Remote
SKU: MILI-REM-RGBWW



ORA 4 Zone RGB+CCT Panel Remote
SKU: MILI-REM-RGBWW-WALL-4Z



RGB+CCT 8 Zone Touch Panel Wall Remote
SKU: MILI-REM-RGBWW-WALL-8Z




DYNAMIC MODE SHEET:

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

SIGNAL MESH:

ORA RGB+CCT MR16 smart bulbs offer seamless control and synchronization. One bulb can transmit signals from the remote control to others within a 98.4 ft radius, allowing for limitless control distance as long as there is a bulb within range. Additionally, multiple bulbs can work synchronously, even when started at different times, as long as they are controlled by the same remote and are within 98.4 ft of each other.

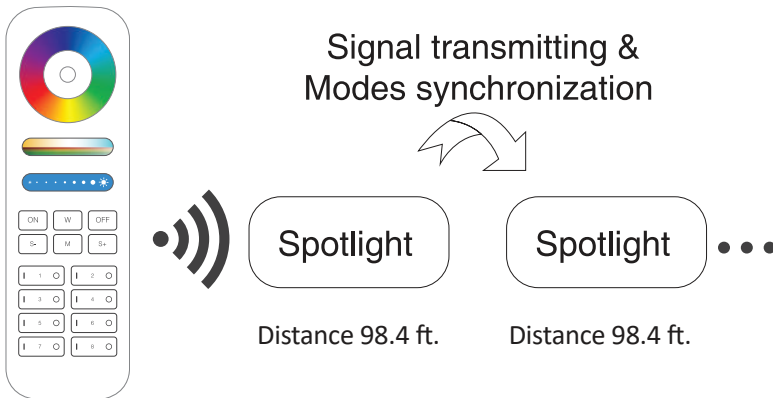

ATTENTION:

1. When installing the light fixtures, please switch off the power.
2. Check whether the input voltage supply is in accordance with the lighting fixture required voltage.
3. Do not open up this product. Disassembling this product will void the warranty
4. For use in temperatures within $-4^{\circ}\text{F} \sim 140^{\circ}\text{F}$; do not use this product in direct sunlight, or in areas where pressurized water will be sprayed on the product.
5. All control distances are max. In cases where other RF signals are within the same range, interference may occur.
6. Do not use the lighting fixtures in high vibration areas.
7. Avoid using the light in areas with extensive metal structures or strong electromagnetic fields. Such environments can significantly reduce the remote control distance.
8. NON-DIMMABLE. NOT FOR USE WITH ANY WALL DIMMER.



Can not connect with dimmable electric circuit, please use remote to dim lighting



Spotlight can not use in humid area

Made in China