

UP DOWN LINEAR LIGHT

Description:

Up/Down linear led light is a commercial pendant lighting fixture utilizing an advanced LED optical system to achieve superior performance. The unique design is nearly transparent luminaire when off and excellent uniformity and efficiency when on, reaching 55% downlighting and 45% uplighting distribution, making the illusion of the light floating in mid-air.



Features:

- 55% downlight and 45% uplight distribution
- CCT adjustable option by dip switch
- 110-347V AC Input option available
- Internal & replaceable driver



Applications:


- Indoor lighting
- Warehouse
- Office

Technical Specifications:


Length	4ft	4ft	8ft
Wattage	40W	40W	80W
Input Voltage	100-347VAC	100-277VAC	100-347VAC
Color Temperature	3500K	CCT Adjustable 3500K/4000K/5000K	3500K
Lumens	4600 LM	4600 LM	9200 LM
Dimming	0-10V		
Finish	White/Custom		
CRI	Ra>80		
Lifespan	50,000 Hours		
Warranty	5 Years		

Mounting:

Individual:

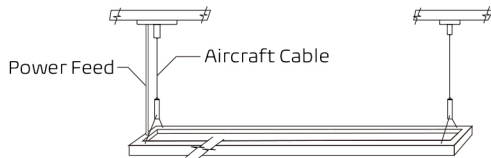

Continuous run:

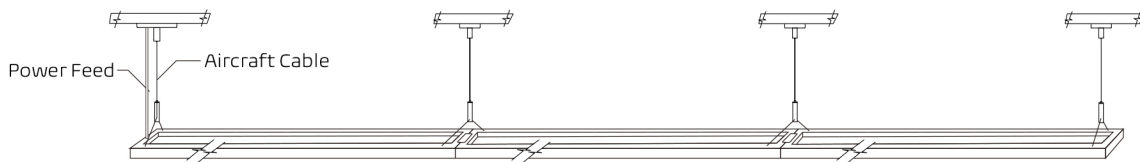


DP4 Connect 9pcs together in 120V AC and 20pcs in 277V AC


DP8 Connect 4pcs together in 120V AC and 10pcs in 277V AC

Dimension:

1)DP4

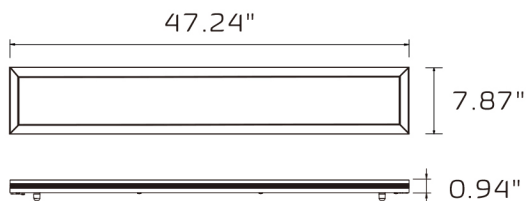

3)DP8

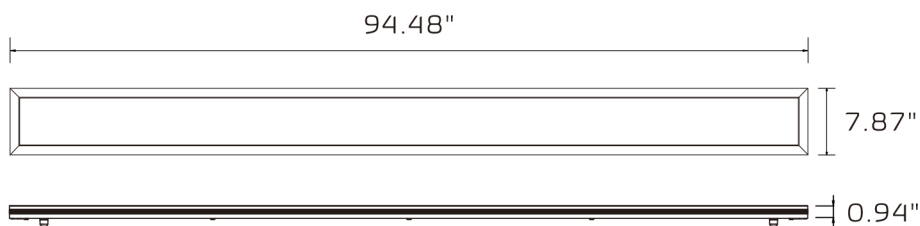


Photometric:


Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM:

DP4-DM-35T

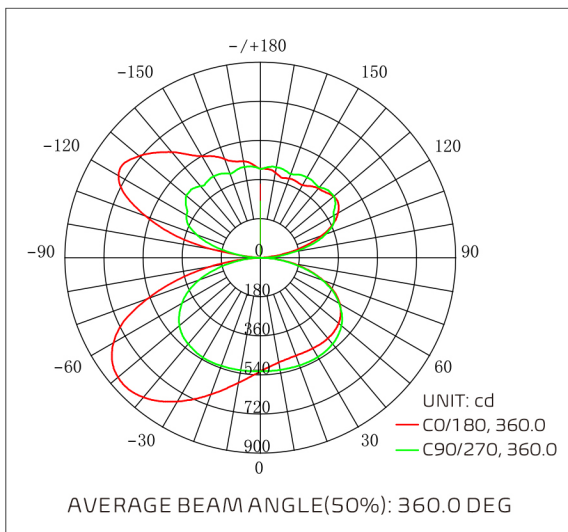

DP4-DM-35E

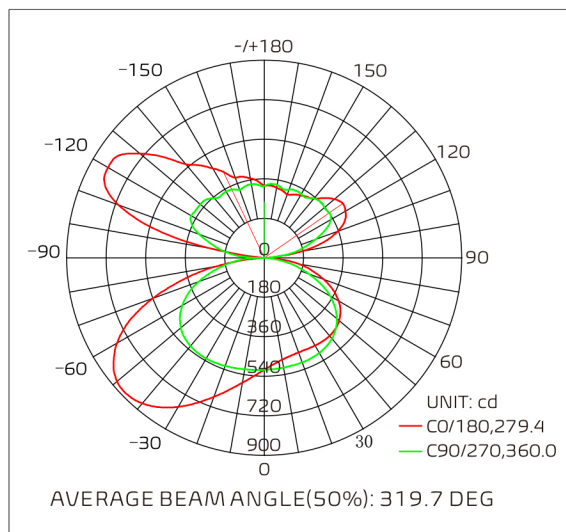

Ordering Guide: (3500K)

Example: NUR-DP4-40W-35E

Length <input type="text"/>	Wattage <input type="text"/>	Color Temperature 35E
NUR-DP4 (4ft)	40W	
NUR-DP8 (8ft)	80W	

Ordering Guide: (CCT)

Example: NUR-DP4-DM-CCT

Length <input type="text"/>	Dimmable <input type="text"/>	Color Temperature <input type="text"/>
NUR-DP4	DM	CCT (3500K 4000K 5000K)