


extrusions



SEAMLESS STRIP LIGHT SERIES

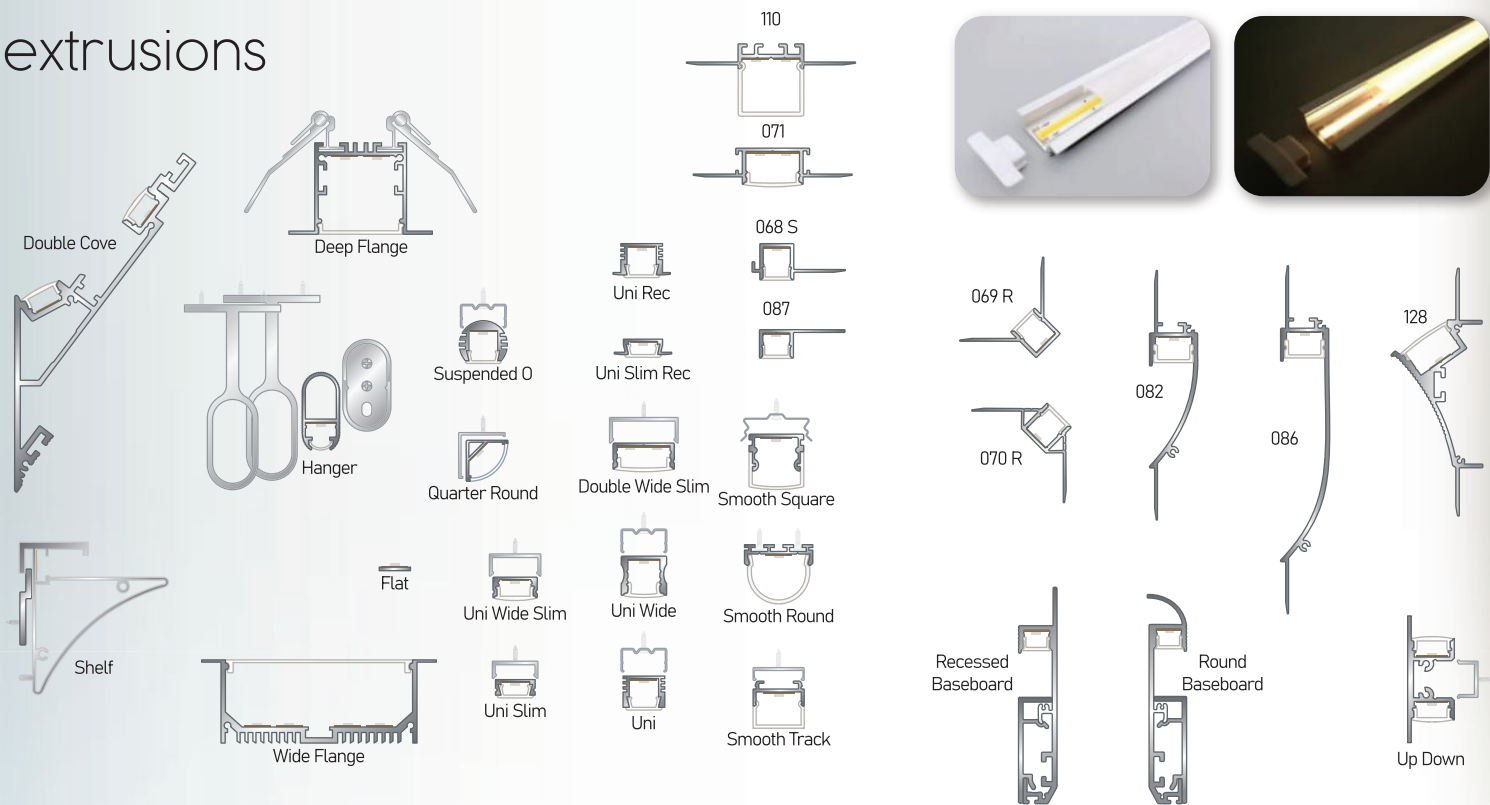

ORDERING CODE

	length	Watts and color temp	IP rating	voltage
STP-SSL	-	-	-	24V
STP-SSL	10FT	4.4W-27K (2700°K)	IP20 (INDOOR)	24V
	15FT	3W-30K (3000°K)	IP68 (OUTDOOR)	
	32FT*	4.4W-30K (3000°K)		
	* 32FT IN 3W ONLY	4.4W-35K (3500°K)		
		3W-40K (4000°K)		
		3W-50K (5000°K)		
		4.4W-RGB (RGB COLOR)		
		4.4W-CCT (COLOR BALANCE)		


EXAMPLE:

STP-SSL	-	15FT	-	3W-30K	-	IP20	-	24V
= STP-SSL-15FT-3W-30K-IP20-24V								




Our flexible SSL (Seamless Strip Light) series creates a seamless line of light from start to finish. The all new Chip-On-Board technology not only improves light quality, but it also improves thermal management and flexibility of the strip.

Why use SSL instead of SMD?

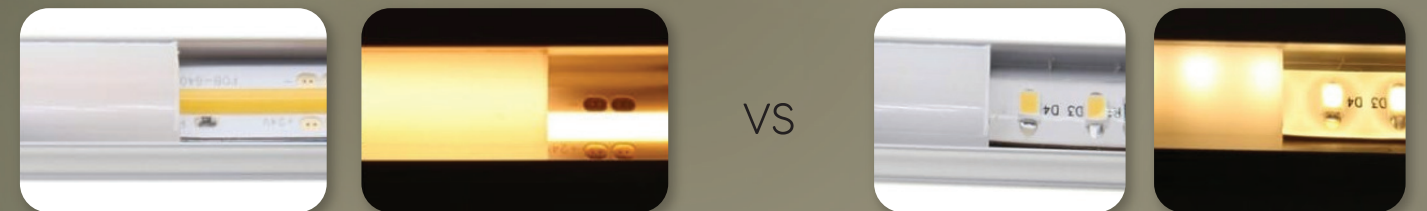

This all new strip design uses flip chip LED technology to eliminate visible hot spots. These smaller LEDs can be packed tighter and weigh much less than bulkier SMD 3040 or 5050 LEDs, creating a strip that can work in nearly any application. The spotless output makes the SSL ideal for applications like display cases and backlighting, or where reflective surfaces such as granite and tile are used.



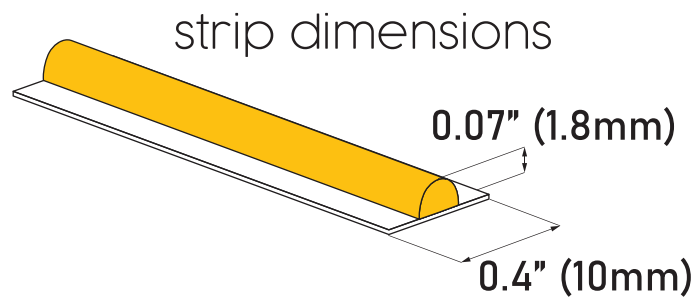

Color Rendering Index > 90

Specification Grade LED Strip

Premium 3M™ Adhesive

30Z (10 Mil) Copper Heatsink

Highest Quality Components


Fully Dimmable

160° Beam Angle.


Operating Temperature
-4°F to +176°F (-20°C to 80°C)

24V DC Input

3W - LUMENS PER FOOT

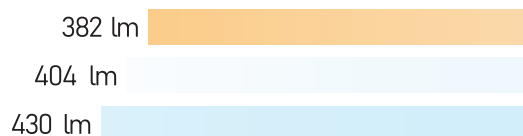


4.4W - LUMENS PER FOOT

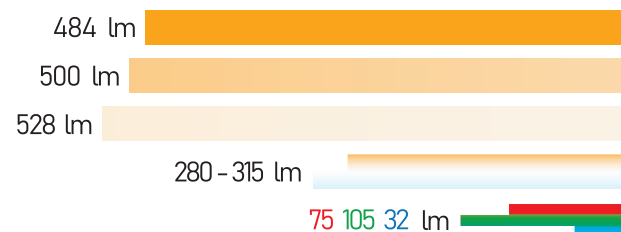


ADJUSTABLE COLOR RGB color changing


cutting increments

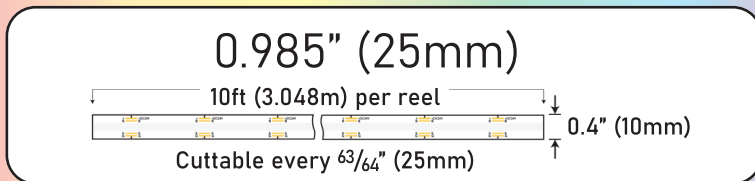


connectors

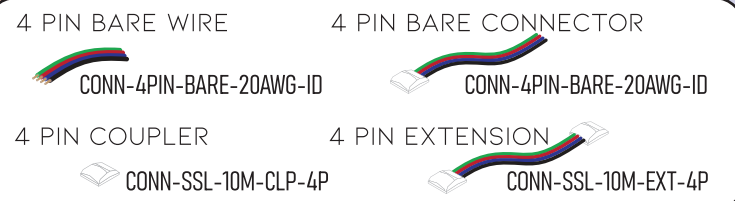





controllers

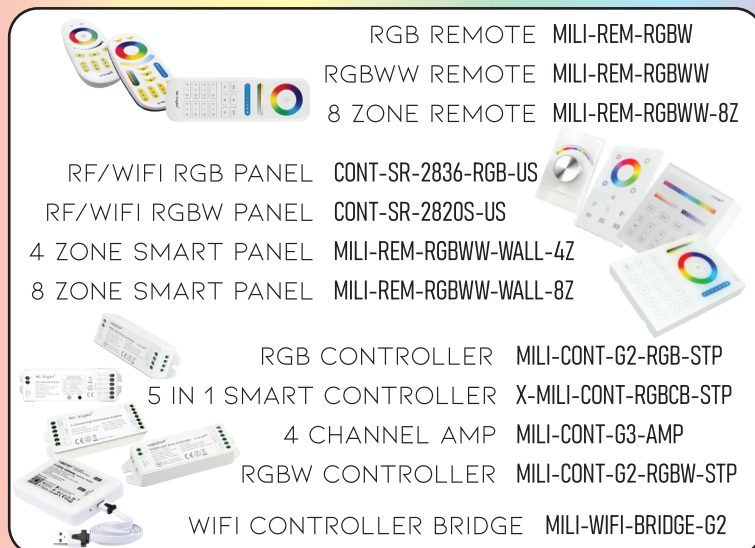






power usage - watts per foot

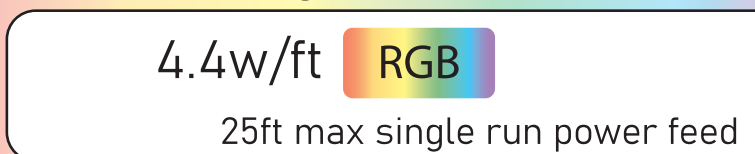

ADJUSTABLE WHITE color balance

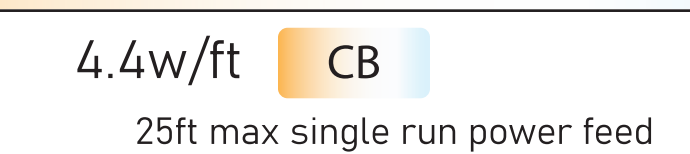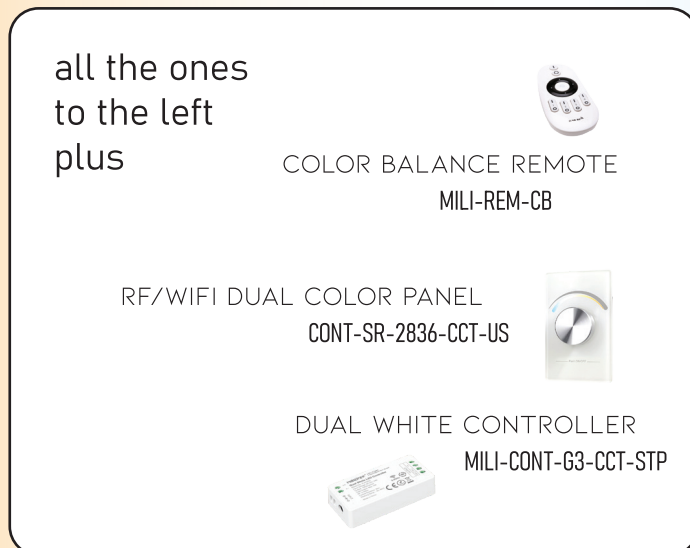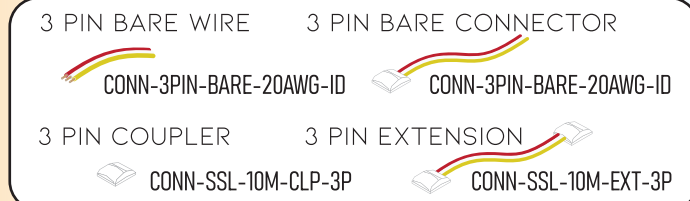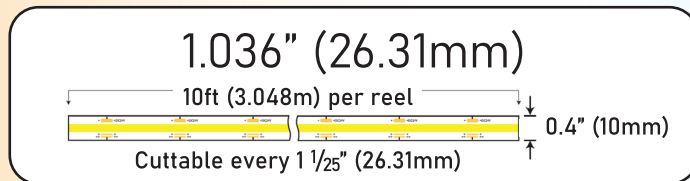

FIXED WHITE

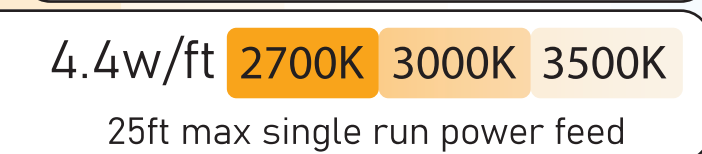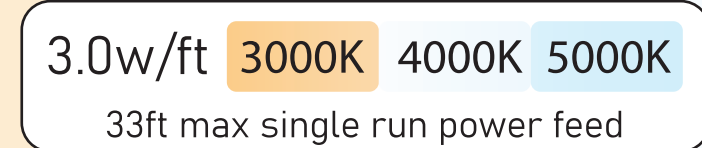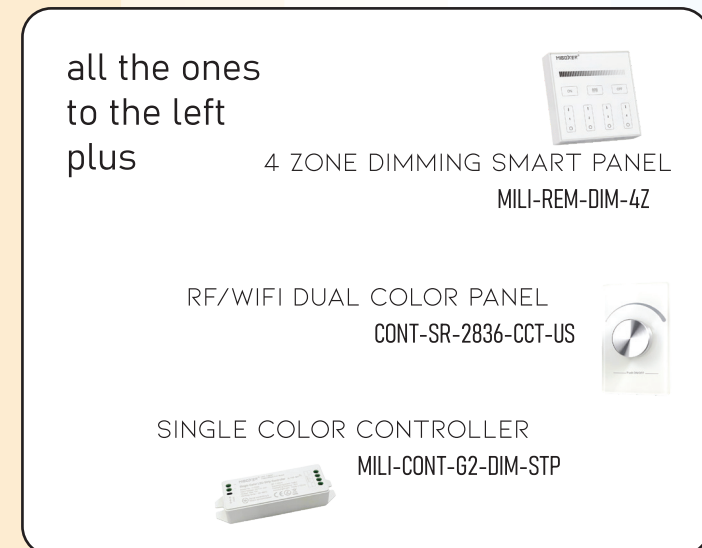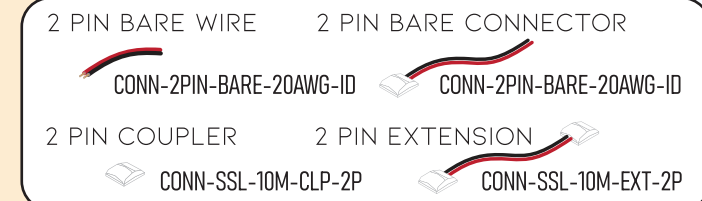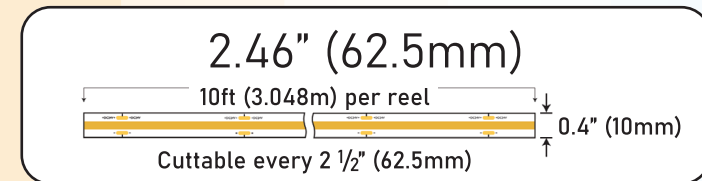

power supplies

OUTDOOR 0-10V DIMMING 24VDC

- 30W PWR-010V-30W-24V-OD
- 60W PWR-010V-60W-24V-OD
- 100W PWR-010V-100W-24V-OD
- 200W PWR-010V-200W-24V-OD



OUTDOOR PHASE/TRIAC DIMMING 24VDC

- 80W PWR-DIM-NUR-24V-80W-OD
- 100W PWR-DIM-NUR-24V-100W-OD
- 200W PWR-DIM-NUR-24V-200W-OD



INDOOR PHASE DIMMING 24VDC

- 25W PWR-DIM-NUR-24V-25W-ID
- 50W PWR-DIM-NUR-24V-50W-ID



MAGNITUDE DIMMING 24VDC

- 20W PWR-DIM-DRV-24V-20W
- 60W PWR-DIM-DRV-24V-60W
- 100W PWR-DIM-DRV-24V-100W
- 200W PWR-DIM-DRV-24V-200W
- 300W PWR-DIM-DRV-24V-300W



MEANWELL DIMMING 24VDC

- 100W PWR-DRV-24V-100W-OD-MW

