

PAR38 10W RGB CCT LED

Features:


- Radio Frequency 2.4GHz
- Dimmable Saturation Control
- RGB+CCT, 16 Millions of colors to choose
- Remote Control (Control Distance 30m)
- Color Temperature 2700K~6500K
- Smart Phone App control Mi.Light WIFI box is needed



Technical Specifications:

- Wattage: 10W
- Input Voltage: AC100~240V
- Frequency: 20/60Hz
- Color Temperature: 2700K~6500K
- Light Efficiency: 90LM/W
- Luminous Flux: 900LM
- CRI > 80
- PF > 0.5
- Beam Angle: 36°
- Base: E26
- Control Distance: 30m
- Size: $\Phi 122 \times 120$ mm
- Lifespan: 50000h

Dimensions:

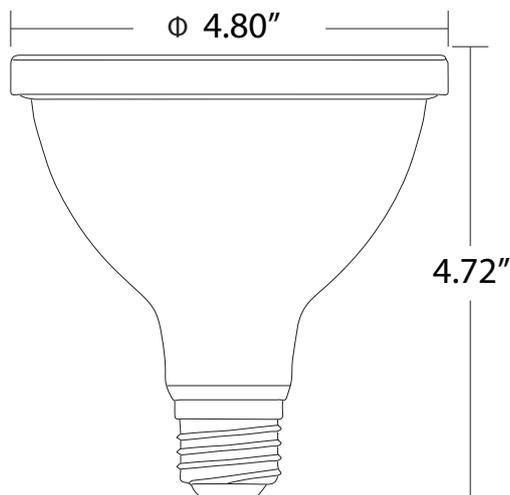

Dynamic Mode Sheet:


Number	Dynamic Mode	Brightness	Speed	Saturation
1	Seven color gradual change	Adjustable	Adjustable	Adjustable
2	White light Gradual change			Unadjustable
3	RGB gradual change			Adjustable
4	Seven color jump to change			
5	Jump to change randomly			
6	Red light gradual change+Flash 3times			
7	Green light gradual change+Flash 3times			
8	Blue light gradual change+Flash 3times			
9	White light gradual change+Flash 3times			Unadjustable

Attention:


1. Make sure the voltage is between AC100~240V.
2. When installing the light, please switch off the power to ensure safety.
3. The working power is high voltage alternating current, so it must be far away from people and must have a ground connection.
4. Avoid using in high temperature or moist conditions.

Link / Unlink:

Compatible with these remote controls
(Purchased Separately)

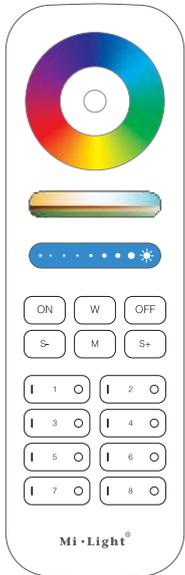


FUT089

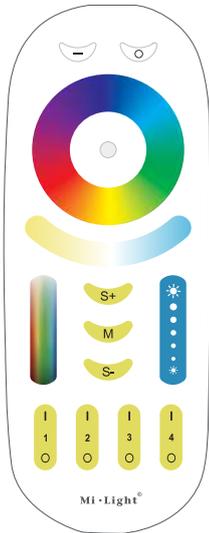


FUT092




FUT088

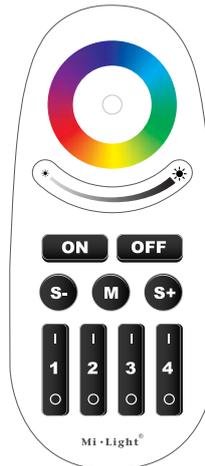


FUT095

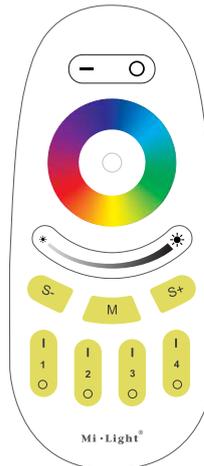


FUT096

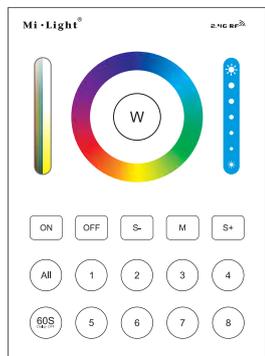


B8



B4 / T4



B3 / T3



B0

NOTE:

Light begins working after linking with remote;
for more details, please read the remote instructions.

ORDERING GUIDE

Example: MILI-PAR38-10W-RGBCB

Bulb Type <input type="text"/>	Wattage <input type="text"/>	CCT <input type="text"/>
MILI-PAR38	10W	RGBCB RGB COLOR BALANCE