


## Overview




- Adjustable light angle**
- Independent USB module: 5V 2A**
- Provides Socket function**
- Triac dimmable:5%-100%**
- Switch dimmable:50%-on/off-100%**
- Adjustable color temperature by switch**
- Linkable function**
- Fixture can be hard-wired or use a power cord**
- Suitable for Damp Locations**
- Accord with Energy Star and California Title 24**
- Life time : >5 Years**
- Easy installation only uses two screws**

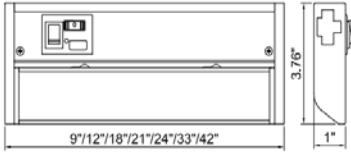

No USB



With Socket




Single CCT





## Specification

Model Number	UC37TD3C09/LV	UC37TD3C12/LV	UC37TD3C18/LV	UC37TD3C24/LV	UC37TD3C33/LV	UC37TD3C42/LV
Input Voltage(V)	120	120	120	120	120	120
Input Power(W)	5	6	9	11	13	16
CRI	>90	>90	>90	>90	>90	>90
CCT(K)	2700/3000/4000	2700/3000/4000	2700/3000/4000	2700/3000/4000	2700/3000/4000	2700/3000/4000
Total Lumen	375	450	675	825	975	1200
Efficacy (lm/W)	75	75	75	75	75	75
Finished	White/Bronze	White/Bronze	White/Bronze	White/Bronze	White/Bronze	White/Bronze
Outer Box	Quantity	12	12	12	6	6
	Size(cm)	35x35x20	41.5x35x20	56.5x35x20	72x24x15.5	94.5x24x15.5
	weight(kg)	6.8	8.1	10.7	7.5	8.8


## Installation Instructions



Hardwire Installation



Mounting Holder

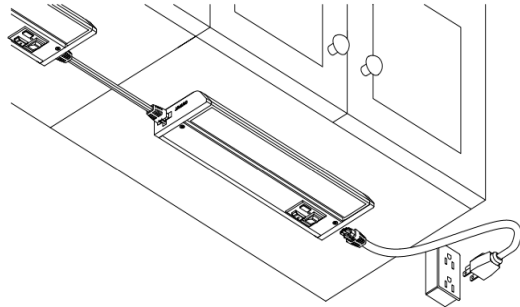

Cord to Outlet Installation

## Included Accessories



## Optional Accessories

