

SHALLOW LINEAR SURFACE LED FIXTURE

Description:

Architectural linear light fixtures are integrated with surface mounted and recessed with a built-in driver. Only 0.94" thickness makes it able to be installed the LED light just about anywhere. It can create a pleasing illumination. A selectable slide switch comes standard with three selectable color temperatures, providing the flexibility to adapt to the changing needs of the space, setting, or environment. It will be your go-to choice for offices, schools, hospitals, corridor light industrial spaces, or anywhere stylish lines of light are desired.



Features:

- Ultra thin profile, only 0.94" thickness
- Built-in driver, supports both surface and recessed mounts
- CCT Adjustable: 3000K,3500K,4000K by dip switch
- Easy and quick installation





Applications:

- Offices
- Schools
- Hospitals
- Corridors

Technical Specifications:

Length	2FT	4FT
Width	6 in.	4 in.
Wattage	20W	40W
Input Voltage	110-347V AC	110-347V AC
Color Temperature (CCT ADJUSTABLE)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
Lumens	1700LM	3200LM
Beam Angle	112°	112°
CRI	>80	>80
Power Factor	>0.9	>0.9
Dimming	1-10V Dimming	1-10V Dimming
Efficacy	850LM/FT	600LM/FT
IP Rating	IP44	IP44
Life Span	50,000 hours	50,000 hours
Warranty	5 Years	5 Years

Dimensions:

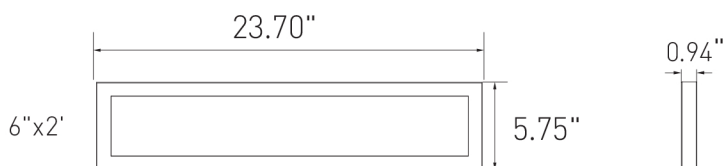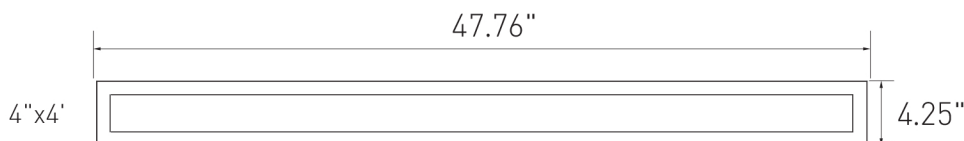

Ordering Guide:

Example: NUR-LS44-CCT-DIM

Series	Type	Color Temperature	Dimming
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
NUR	LS26 LS44	CCT CCT Selectable (3000K, 3500K, 4000K)	DIM 0-10V

Mounting Kit:

- Surface-Surface Mounted Kit



This metal plate is equipped with screw holes for bolting to the ceiling and 4 small static corner hooks on the mounting plate.

- Recessed-Driver Box



This metal box is equipped with screw holes for bolting to the fixture to protect wires.