


SSL CONNECTORS

L Connectors:

- Working temperature : 14°F - 113°F
- Wattage: DC36V/5A
- SKU: CONN-CLP-SSL-L
- Dimensions:
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.2"



Installation:

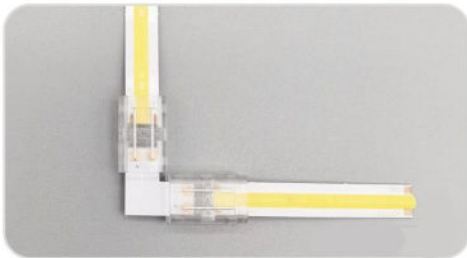


T Connectors:

- Working temperature : 14°F - 113°F
- Wattage: DC36V/5A
- SKU: CONN-CLP-SSL-T
- Dimension:
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.2"



Installation:

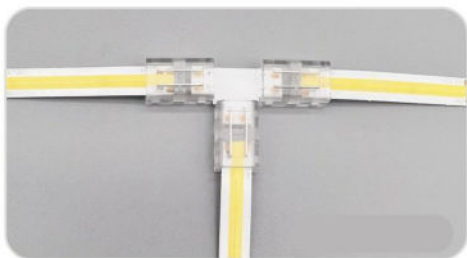


X Connectors:

- Working temperature : 14°F - 113°F
- Wattage: DC36V/5A
- SKU: CONN-CLP-SSL-CROSS
- Dimensions:
 - Length: 2.125"
 - Width: 2.125"
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.31"




Installation:

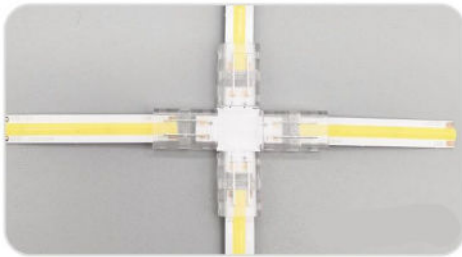


BARE Connectors:

- Working temperature : 14°F - 113°F
- Wattage: DC36V/5A
- SKU: CONN-CLP-SSL-10mm-BARE
- Dimensions:
 - Length: 6.5"
 - Width: 0.5"
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.2"

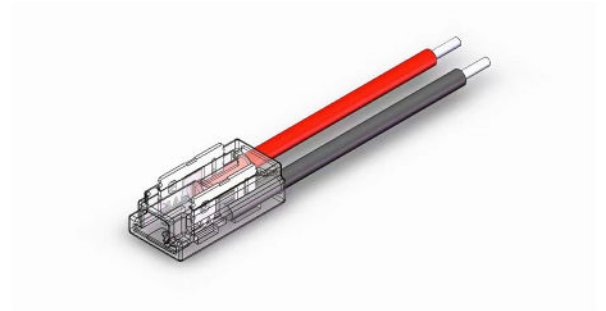

Installation:

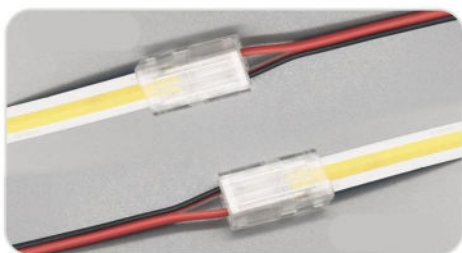


COUPLER Connectors:

- B2P-10-10mm
- SKU: CONN-CLP-SSL-10mm-CLP
- Dimensions:
 - Length: 0.62"
 - Width: 0.5"
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.2"



Installation:

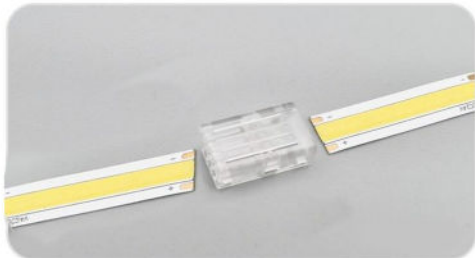

Extender Connectors:

- Working temperature : 14°F - 113°F
- Wattage: DC36V/5A
- SKU: CONN-CLP-SSL-10mm-EXT
- Dimensions:
 - Length: 7"
 - Width: 0.5"
 - Strip width: 0.4"
 - Channel width: 0.5"
 - Channel height: 0.2"



Installation:

