


## Vertical Linear LED Light Fixture - CCT Adjustable

### Description:

The LV series suspended linear LED light fixture combines brilliant design and intuitive engineering to deliver unprecedented performance. It is a distinct statement in any work space.

It is integrated with ultra-thin semi-transparent vertical optics, enveloped in a signature sloping silhouette; where the frame meets the optics, precisely controlled optimal direct indirect distributions at a split of light between the direct surfaces below and the ambient area horizontal the fixture.

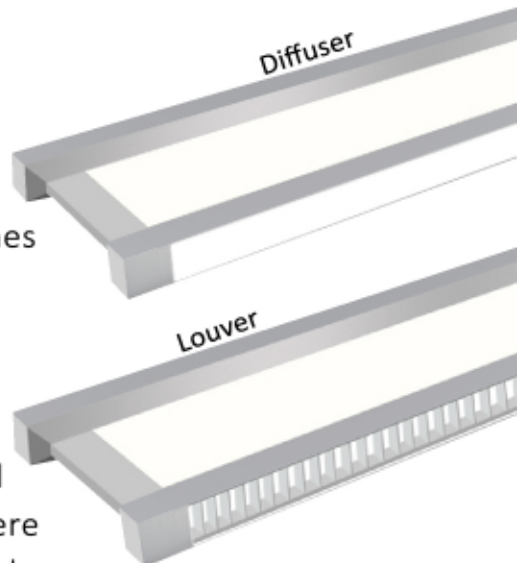

### Features:


- Finish: Silver
- Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-D
- Transparent vertical optics, enveloped in a signature sloping silhouette
- Application flexibility, T-grid or dry ceiling compatible
- CCT Adjustable: 3000K, 3500K, 4000K by dip switch
- Mounting: Suspending
- Seamless continuous runs, up to 40' per power feed
- Driver: Internal
- CRI: Ra>80
- PF: >0.9
- Emergency or sensor options



### Technical Specifications:

<b>Length</b>	4FT	
<b>Wattage</b>	40W	
<b>Input Voltage</b>	110-277 V AC	
<b>Optics</b>	Diffuser	Louver
<b>Light Distribution</b>	Direct, Indirect	Direct
<b>Color Temperature</b>	CCT Tunable (3000K, 3500K, 4000K)	
<b>Lumen Output</b>	4000 LM	3200 LM
<b>Efficacy</b>	1000 LM/FT	800 LM/FT
<b>Dimming</b>	0-10V	
<b>CRI</b>	Ra>80	
<b>Power Factor</b>	>0.9	
<b>Life Span</b>	50,000 hours	
<b>Warranty</b>	5 Years	

### Dimensions:

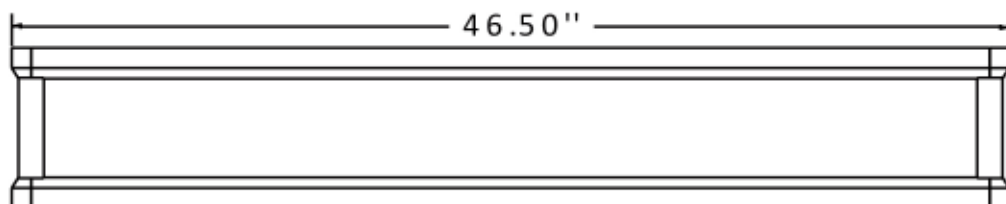




**Ordering Guide: (Vertical Linear)**

Example: NUR-LV4-40W-CCT-DIM


Series <input type="text"/>	Type <input type="text"/>	Wattage <input type="text"/>	Color Temperature <input type="text"/>	Dimming <input type="text"/>
<b>NUR-LV</b> Vertical Linear	<b>4</b> 4FT	<b>40W</b>	<b>CCT</b> CCT Selectable (3000K, 3500K, 4000K)	<b>DIM</b> 0-10V

**Mounting:**


Dry Ceiling / Off Grid

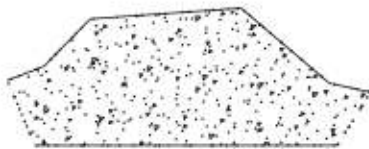


Various "Hard Ceilings"  
(Mount to J-box)

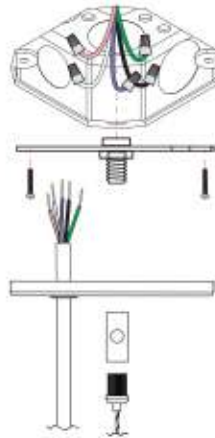


Drop Ceiling / On Grid




9/16" Flat Ceiling




9/16" Slot Ceiling




15/16" Flat Ceiling



15/16" Slot Ceiling

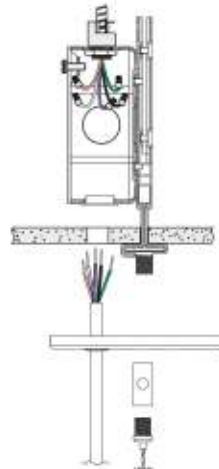


### Individual

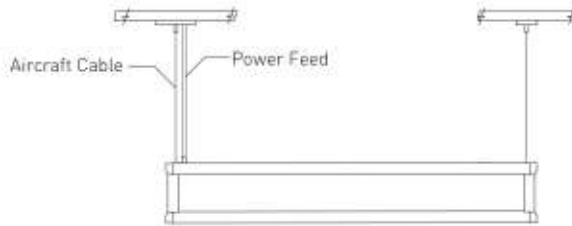


### Continuous Run



Align position



Slide fixtures together



Secure fixtures together via screwdriver

The maximum connection of each input line is less than 40FT in 120AC, less than 100FT in 277AC.

### Mounting Option:

- Pendant

### Pendant Accessory for Dry Ceiling:



2" Round Canopy



4" Round Canopy



2" Square Canopy



4" Square Canopy

## Pendant Accessory for Drop Ceiling:



T-grid Hanger(Non-Feed) +  
2" Round Canopy



T-grid Hanger(Feed) +  
4" Round Canopy



T-grid Hanger(Non-Feed) +  
2" Square Canopy



T-grid Hanger(Feed) +  
4" Square Canopy

### Ordering Guide: (Accessories for Dry & Drop Ceiling)

Example: NUR-LV-DRY-4FT-RND-WHT

Series	Mounting Type	Fixture Length	Canopy Shape	Canopy Finish
<input type="text"/> <b>NUR-LV</b> Vertical Linear	<input type="text"/> <b>DRY</b> Dry Ceiling <b>DRP</b> Drop Ceiling	<input type="text"/> <b>4FT</b> 4ft Fixture	<input type="text"/> <b>RND</b> Round <b>SQR</b> Square	<input type="text"/> <b>WHT</b> White <b>BLK</b> Black

### Dry Ceiling Accessories include:

- For 4FT Fixture: 4 inch Canopy (Qty 1), 2 inch Canopy (Qty 1)

### Drop Ceiling Accessories include:

- For 4FT fixture: A set of 4inch Canopy with T-Grid hanger (feed),  
A set of 2inch Canopy with T-Grid hanger (non-feed)