


COMMERICAL DOWNLIGHT 6"

Description:

This commercial downlight is 15 in 1 available in 3 wattages and 5 CCT unable. 120-277V@60HZ input voltage, 0-10V dimming Wet-location and IC rated, ideal use for commercial complexes, hospitality, healthcare industry, school, shopping centers, industrial areas, and hotels.

Features:




- High luminous efficacy, up to 100LM/W
- High-quality Aluminum shell with frosted PC diffuser
- Lumens: 1296LM/1694LM/2194LM
- Wattage: Selectable 12W/17/22W

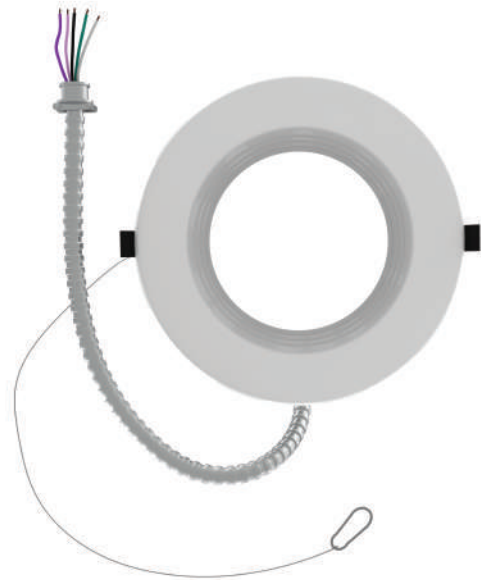

Applications:

- Industrial areas
- Shopping malls
- Hospitals
- Hotels
- Schools


Dimensions:

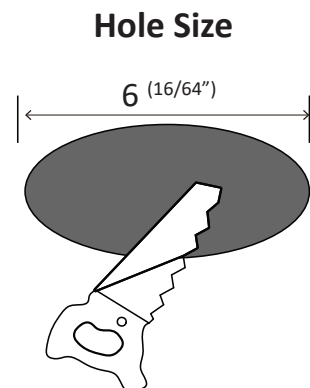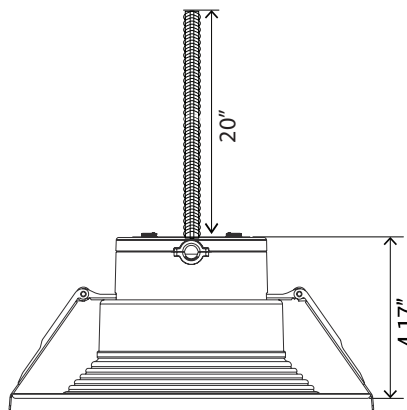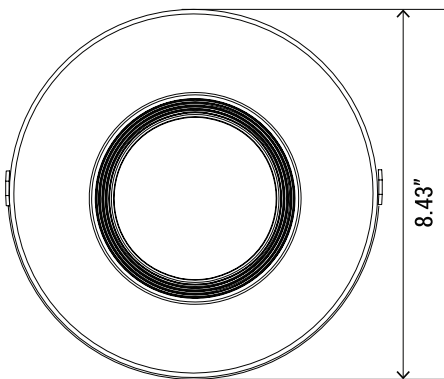

Technical Specifications:

WATTAGES	Selectable 12W/17/22W
LUMENS	1296LM/1694LM/2194LM
VOLTAGE	120V-277V
POWER FREQUENCY	50/60HZ
POWER FACTOR	>0.9
Color Temperature	2700K/3000K/3500K/4000K/5000K
CRI	>90
BEAM ANGLE	100°
MATERIAL	AL+PC
LIFESPAN	>50,000 Hours
OPERATING	-4°F-122°F
DIMMABLE	0-10V dimming
RATING	Suitable For Wet Location
WARRANTY	5 year limited

Change lumen output for desired application

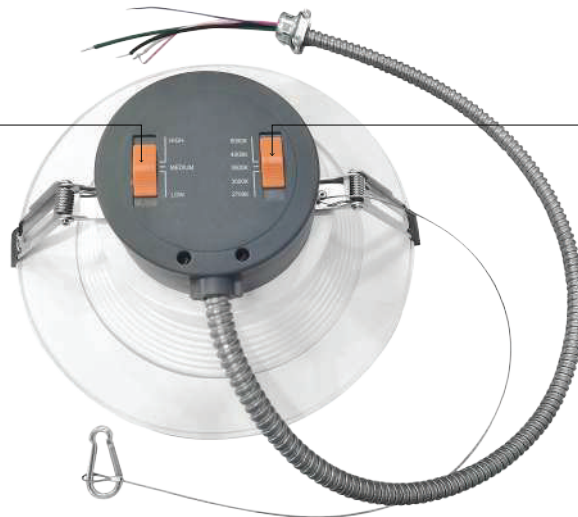

Change color temperature with the simple flip of a switch

