

# SHALLOW LINEAR FLUSH MOUNT LED FIXTURE

## DESCRIPTION:

Architectural linear light fixtures are integrated with surface mounted and recessed with a built-in driver. Only 0.94" thickness makes it able to be installed the LED light just about anywhere. It can create a pleasing illumination. A selectable slide switch comes standard with three selectable color temperatures, providing the flexibility to adapt to the changing needs of the space, setting, or environment. It will be your go-to choice for offices, schools, hospitals, corridor light industrial spaces, or anywhere stylish lines of light are desired.



## FEATURES:

- Ultra thin profile, only 0.94" thickness
- Built-in driver, supports both surface and recessed mounts
- CCT Adjustable: 3000K,3500K,4000K by dip switch
- Easy and quick installation

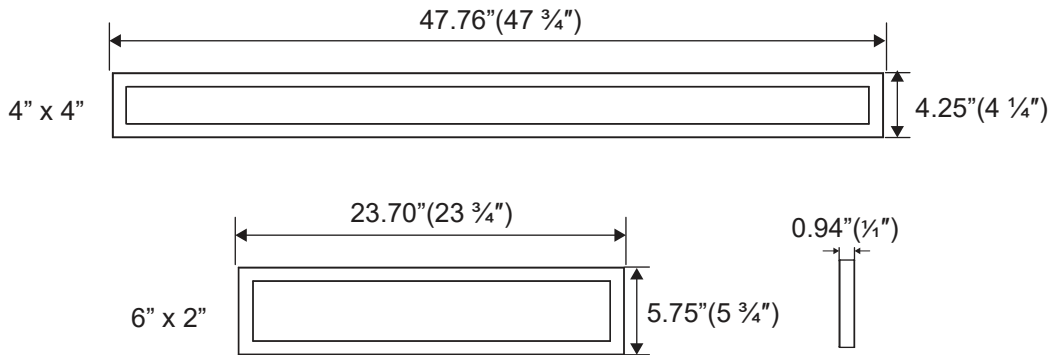


## APPLICATIONS:

- Offices
- Schools
- Hospitals
- Corridors

## TECHNICAL SPECIFICATIONS:

Length	2FT	4FT
Width	6 in.	4 in.
Wattage	20W	40W
Input Voltage	110-347V AC	
Color Temperature (CCT ADJUSTABLE)	3000K, 3500K, 4000K	
Lumens	1700LM	3200LM
Beam Angle	112°	
CRI	>80	
Power Factor	>0.9	
Dimming	1-10V Dimming	
Efficacy	850LM/FT	600LM/FT
IP Rating	IP44	
Life Span	50,000 hours	
Warranty	5 Years	

**DIMENSIONS:**

**ORDERING GUIDE:**

SKU: NUR-LS44-CCT-DIM			
Series	Type	Color Temperature	Dimming
NUR	LS26 LS44	CCT CCT Selectable (3000K, 3500K, 4000K)	DIM 0-10V

**MOUNTING KIT:**
**• Surface-Mounted Kit:**

This metal plate includes screw holes for secure ceiling installation, along with four small corner hooks on the mounting plate for added stability.


**• Recessed Driver Box:**

This metal box features screw holes to attach it to the fixture, providing protection for the wiring inside.

