

## Features

- Sealed die-casting profile for outdoor applications
- Available with Type III photometry
- Head tilts max 20degree for different lighting purposes
- Replaces 175-250W MH
- Lumen ouput from 7700-10500lm with efficacy of 103lm/W
- Built-in UL class 2 driver, optional for photocell
- UL Wet location listed and DLC qualified



## Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways



## Specification

Speci cation/Model	NUR-WP-S-70W-5000K	NUR-WP-S-75W-5000K	NUR-WP-S-90W-5000K	NUR-WP-S-95W-5000K
Input Power	70W	75W	90W	95W
Lumens output	7800lm	7800lm	10500lm	10500lm
Efficacy	111 lm/W	104 lm/W	117 lm/W	111 lm/W
CRI	70			
Color Temperature	5000K			
Input Voltage	120-277VAC	347VAC	120-277VAC	347VAC
Finish Color	Dark Bronze			
Lens	Tempered glass			
Mounting	Fits electrical box and wall mount directly			
Photocell	120-277VAC Optional			

## Ordering Guide

EXAMPLE : NUR-WP-S-70W-5000K

Fixture Type	Power Consumption	Input Voltage	CCT	Finish	Photocell (Option)
WPI Full Cutoff Wall Pack	70W 70Watts	27V 120-277V	40K 4000K	D Dark Bronze	P1 120V Photocell
	75W 75Watts	34V 347V	50K 5000K	B Black	P0 120-277V Photocell
	90W 90Watts				Blank Without Photocell
	95W 95Watts				


Note: 75W,95W type are only available for 347V input voltage.

## Ordering Information

Ordering	Rated	Luminaire	Wattage	CCT	Initial	Luminaire	Rated	CRI	Power	Dimmable	Photocell	Certi cate
Code	Voltage(VAC)	Type	(W)		Lumens(lm)	Efficacy(lpw)	Life(hrs)		Factor			
WPI70W27V40KD*	120-277V	Full Cutoff Wall Pack	70	4000	7700	110	50000	72	0.9	NO	NO	UL/DLC
WPI70W27V40KDP1	120V	Full Cutoff Wall Pack	70	4000	7700	110	50000	72	0.9	NO	YES	UL/DLC
WPI70W27V40KDP0	120-277V	Full Cutoff Wall Pack	70	4000	7700	110	50000	72	0.9	NO	YES	UL/DLC
WPI70W27V50KD	120-277V	Full Cutoff Wall Pack	70	5000	7800	111	50000	72	0.9	NO	NO	UL/DLC
WPI70W27V50KDP1	120V	Full Cutoff Wall Pack	70	5000	7800	111	50000	72	0.9	NO	YES	UL/DLC
WPI70W27V50KDP0	120-277V	Full Cutoff Wall Pack	70	5000	7800	111	50000	72	0.9	NO	YES	UL/DLC
WPI75W34V40KD	347V	Full Cutoff Wall Pack	75	4000	7700	103	50000	72	0.9	NO	NO	UL
WPI75W34V40KDP0	347V	Full Cutoff Wall Pack	75	4000	7700	103	50000	72	0.9	NO	YES	UL
WPI75W34V50KD	347V	Full Cutoff Wall Pack	75	5000	7800	104	50000	72	0.9	NO	NO	UL
WPI75W34V50KDP0	347V	Full Cutoff Wall Pack	75	5000	7800	104	50000	72	0.9	NO	YES	UL
WPI90W27V40KD	120-277V	Full Cutoff Wall Pack	90	4000	10000	111	50000	72	0.9	NO	NO	UL/DLC
WPI90W27V40KDP1	120V	Full Cutoff Wall Pack	90	4000	10000	111	50000	72	0.9	NO	YES	UL/DLC
WPI90W27V40KDP0	120-277V	Full Cutoff Wall Pack	90	4000	10000	111	50000	72	0.9	NO	YES	UL/DLC
WPI90W27V50KD	120-277V	Full Cutoff Wall Pack	90	5000	10500	117	50000	72	0.9	NO	NO	UL/DLC
WPI90W27V50KDP1	120V	Full Cutoff Wall Pack	90	5000	10500	117	50000	72	0.9	NO	YES	UL/DLC
WPI90W27V50KDP0	120-277V	Full Cutoff Wall Pack	90	5000	10500	117	50000	72	0.9	NO	YES	UL/DLC
WPI95W34V40KD	347V	Full Cutoff Wall Pack	95	4000	10000	105	50000	72	0.9	NO	NO	UL
WPI95W34V40KDP0	347V	Full Cutoff Wall Pack	95	4000	10000	105	50000	72	0.9	NO	YES	UL
WPI95W34V50KD	347V	Full Cutoff Wall Pack	95	5000	10500	111	50000	72	0.9	NO	NO	UL
WPI95W34V50KDP0	347V	Full Cutoff Wall Pack	95	5000	10500	111	50000	72	0.9	NO	YES	UL

## Dimension

unit: inch/mm

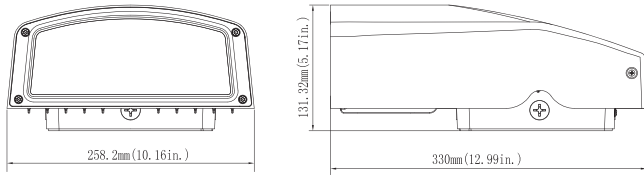


## Energy Saving Replacement

MODEL	Replacing
NUR-WP-S-70W-5000K, NUR-WP-S-75W-5000K	175 MH
NUR-WP-S-90W-5000K, NUR-WP-S-95W-5000K	250 MH


## Photometrics

### NUR-WP-S-70W-5000K

#### Luminous Intensity Distribution Curve




#### Illuminance at a Distance



### NUR-WP-S-90W-5000K

#### Luminous Intensity Distribution Curve



#### Illuminance at a Distance

