

G24 PL 4 PIN HORIZONTAL LED BULB

DESCRIPTION:

G24 PL 4 Pin Horizontal LED Bulb is a Replacement for 26W CFL with 2-pin or 4-pin G24q-1, G24q-2, G24q-3, GX24q-1, GX24q-2 and GX24q-3 sockets. This 12W LED bulb is easy to install and compatible with electronic ballast. Die-cast aluminum offers superior heat dissipation. These horizontal LED tubes are UL-listed and non-dimmable. This energy-efficient bulb is ideal for Downlights, Scones, Vanity Lights, and other horizontal mounting applications.



FEATURES:

- Energy Efficient: 12W usage replaces 26W CFL with DLC certification for rebates.
- Eco-Friendly: Contains no lead or mercury.
- Long Lifespan: 50,000-hour rating; lasts 5x longer than CFLs.
- Advanced Heat Management: Aluminum heat sink for superior heat dissipation, suitable for enclosed luminaires.
- Instant-On: Immediate full brightness, no warm-up time.



Compatible: Fits 6" cans and serves as an equivalent to a 26W CFL.

Thermal Protection: Built-in thermal detector prevents overheating by cutting power if used with an incompatible ballast.

Fixture Suitability: Not designed for use in fully enclosed fixtures.

Rotatable: 180° Adjustable Orientation for Horizontal Models

Hybrid Technology: Operates with 120-277V AC or compatible with CFL ballasts.

Efficient Heat Management: Die-cast aluminum heat sink for optimal thermal performance.

Universal Base: G24Q-4 pin base, compatible with G24Q-1, G24Q-2, G24Q-3, GX24Q-1, GX24Q-2, and GX24Q-3 sockets.

Non dimmable

UL Listed: Approved for use in damp locations.

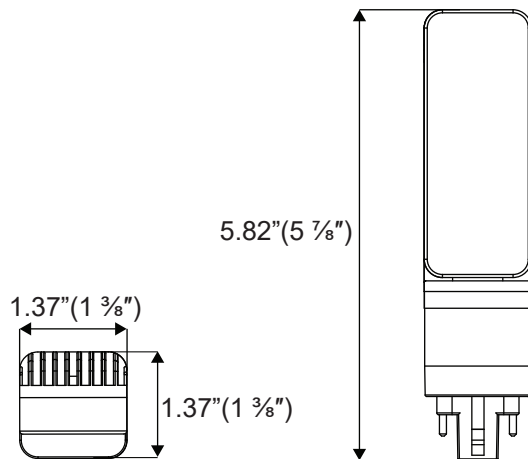
APPLICATIONS:

Ideal for retrofitting in various residential and commercial settings, including:

- Downlights and ceiling fixtures
- Wall sconces and vanity lights
- Desk lamps and recessed can lighting

TECHNICAL SPECIFICATIONS:

Type	Horizontal
Base	G24Q 4-pin
Wattage	12W (26W CFL equivalent)
Color Temperature	3000K , 4000K , 5000K
Voltage	120-277V
Lumen Output	900 lm (3000K), 1100 lm (4000K/5000K)
Color Rendering Index (CRI)	80
Beam Angle	140°
Power Factor	0.9
Lifespan (L70)	50,000 hours
Efficiency	91 lm/W
Dimmable	No
Dimensions	5.82" (Length) x 1.37" (Diameter)
Rotation	180° adjustable
UL Classification	Suitable for damp locations (not for direct exposure to weather)

DIMENSIONS:

ORDERING GUIDE:

SKU: G24-12W-3000K-H			
Model	Wattage	Color Temperature	Type
G24	12W	3000K 4000K 5000K	Horizontal

ADAPTER (SOLD SEPARATELY):

- G24 L Adapter
- SKU: G24-Adaptor-L
- This adapter allows for conversion of a horizontal socket to a vertical socket, making it compatible with the G24 plug light. The adjustable telescoping and swiveling arm centers the light perfectly in recessed downlights.



- G24 Male to E26 Female Adapter
- SKU: CONV-G24M-E26F
- This adapter converts a 4-pin G24 base socket to a standard E26 screw-in socket, expanding compatibility with various bulb types. It is built with a flame-retardant PBT body and copper contacts for reliable performance.



- GU24 Male to E26 Female Converter
- SKU: CONV-IL-AD-GU24M to E26F
- This adapter converts a 2-pin GU24 base socket to a standard E26 screw-in socket, allowing compatibility with a wider range of bulbs. Constructed with a flame-retardant PBT body and copper contacts, it ensures safety and durability.

