

COMMERCIAL RETROFIT DOWNLIGHT - WATTAGE TUNABLE & CCT ADJUSTABLE

DESCRIPTION:

The commercial retrofit downlight is a versatile lighting solution suitable for commercial and residential settings. It offers adjustable CCT and wattage options for energy efficiency and cost-effectiveness. With customizable color and brightness features, it can meet diverse lighting needs. Available in three trim styles and with dimmable functionality, this downlight is ideal for offices, conference rooms, auditoriums, and retail spaces.



FEATURES:

- Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-D
- Materials: Aluminum haze trim with white trim ring
- Mounting: Recessed
- LED Lifetime: >50,000 hours (L70 minimum)
- Design: Split design of the LED light engine and trim. One engine allows seamless integration with multiple trim options.
- Mounting: Provided with spring steel friction clips, allowing installation in a variety of commercial recessed open-frame rough-in sections.
- LED Driver: Isolated, Class 2 output LED driver that accommodates input voltages from 100-277V AC or 100-347V AC. It is dimmable with most 0-10V wall box dimmers.






APPLICATIONS:

The retrofit downlight for installation in all compatible recessed housings found in:

- Hotels
- Offices
- Major retail stores
- Education facilities
- Government buildings
- Hospitals

DIMENSIONS:

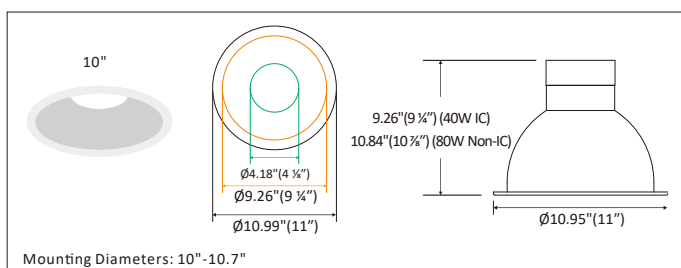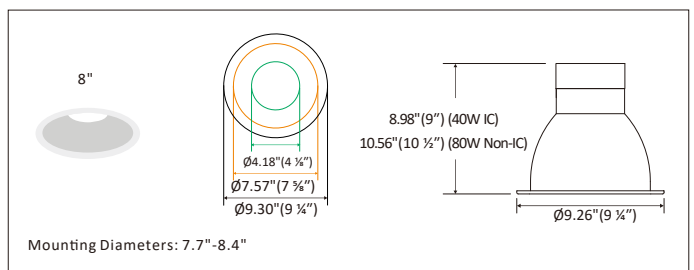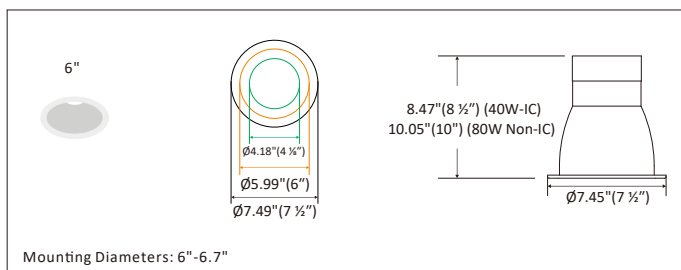



TECHNICAL SPECIFICATIONS:


Wattage	40W	80W
Input Voltage	120-277VAC	110-347V
Color Temperature	CCT Adjustable 3000K/3500K/4000K	3500K
Wattage Tunable	18W/27W/40W	50W/65W/80W
Lumen Output	1500LM/2300LM/3500LM	4200LM/5500LM/6800LM
Trim Options	6",8",10"	6",8",10"
CRI	> 80	> 80
Power Factor	> 0.90	> 0.90
Dimming	0-10V	0-10V
IP Rating	IP-710-DL	IP-710-DL
Life span	50,000 hours	50,000 hours
Warranty	5 years	5 years

ORDERING GUIDE: (COMMERCIAL DOWNLIGHT)

SKU: NUR-CES-40W-CCT		
Series <input type="text"/>	Wattage <input type="text"/>	Color Temperature <input type="text"/>
NUR-CES	40W 80W	CCT 3000K/3500K/4000K 3500K

*CCT Selectable: 3000K,3500K,4000K available only for 40W light engine.

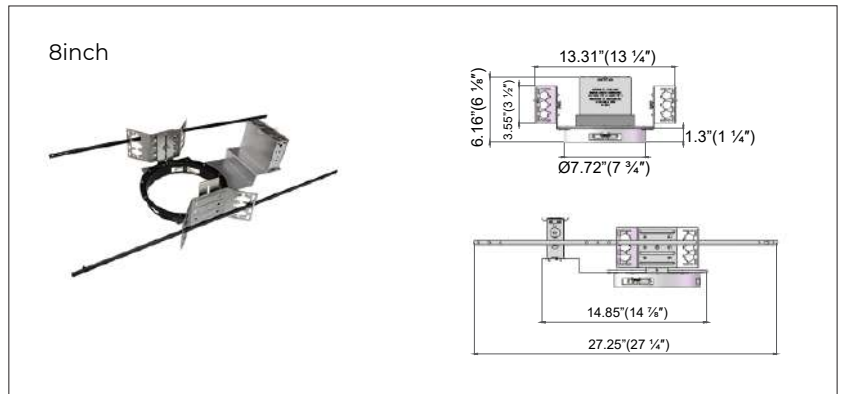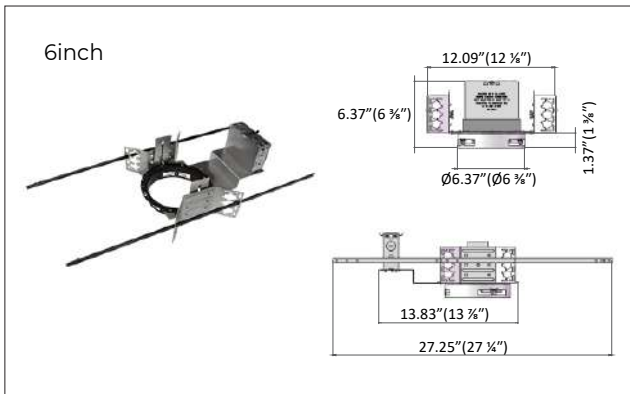OPTIONAL NEW CONSTRUCTIONAL FRAME:

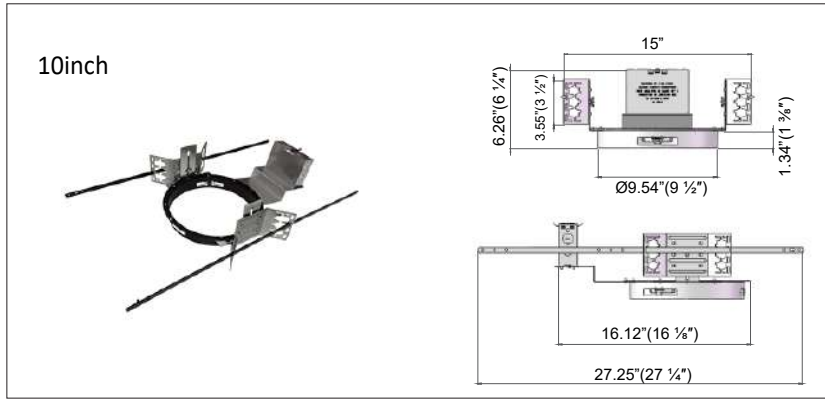


ORDERING GUIDE: (CONSTRUCTIONAL FRAME)

Example: NUR-CE6-Frame			
Series	Type		Kit
<input type="text"/>	<input type="text"/>		<input type="text"/>
NUR-CE	6 8 10	6" 8" 10"	Frame

ORDERING GUIDE: (ACCESSORIES TRIM)

Example: NUR-CE6-Trim			
Series	Type		Kit
<input type="text"/>	<input type="text"/>		<input type="text"/>
NUR-CE	6 8 10	6" 8" 10"	Trim