

WALL PACK (CCT TUNABLE)

DESCRIPTION:

This Wall Pack (CCT Tunable) light is constructed from sealed die casting provides a long lifespan. This 1-10V dimming option is available in tunable CCT options. Its Color temperature can be changed to 3000K/4000K/5000K according to your liking. This 120-277 VAC input voltage light is designed to replace 400W metal halide and saves upto 87% energy cost. This wall Pack is ideal for outdoor applications.

FEATURES:

- Sealed die-cast profile designed for outdoor applications.
- Die-casting ensures efficient thermal conductivity to dissipate LED heat, enhancing performance and extending lifespan.
- Engineered to meet 3G vibration testing requirements as prescribed by ANSI C136.31 standards.
- Available in single-color temperatures of 3000K, 4000K, or 5000K for standard versions, with an optional color-tunable version adjustable to 3000K, 4000K, or 5000K.
- Optic lens options include UV-stabilized polycarbonate or glass, featuring a professional prismatic design for excellent light distribution and uniform illumination.
- Supports universal input voltage of 120-277V or 347-480V AC.
- Equipped with 1-10V dimming capability for flexible light control.
- High-performance drivers deliver a power factor greater than 90% and total harmonic distortion (THD) under 20%.
- Operates reliably within a temperature range of -40°F to 104°F.
- Designed for an estimated LED lifespan of 50,000 hours, verified through IES LM-80 testing and TM-21 calculations.





APPLICATIONS:



- Outdoor Wall Lighting
- Building Entrances
- Schools
- Tunnels
- Factories
- Loading Docks

DIMENSIONS:

62W

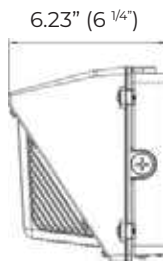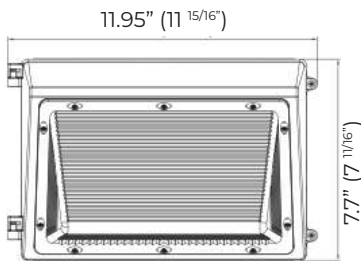

100W

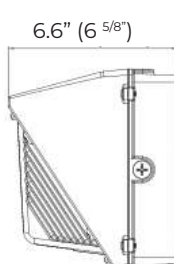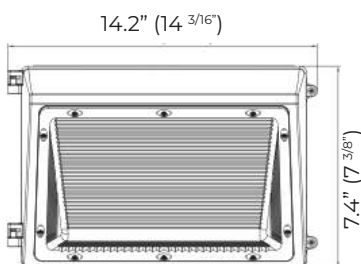

TECHNICAL SPECIFICATIONS:


Wattage	62W	100W
Input voltage	120- 277Vac	120- 277Vac
Dimming	1-10V	1-10V
CRI	70	70
Color Temperature	CCT Adjustable (3000K/4000K/5000K)	CCT Adjustable (3000K/4000K/5000K)
Lifespan	50,000 hours	50,000 hours
Finish	Dark Bronze	Dark Bronze
Input voltage: 347- 480Vac	Available On Special Order	Available On Special Order
Size	11.95 x 7.7 x 6.23 in	14.2 x 7.4 x 6.6 in
Warranty	5 Years	5 Years

ADJUSTABLE LUMEN OUTPUT:

Setting	Diffuser	62W Lumens	100W Lumens
100%	PC Diffuser	7814.20	12468.10
80%	PC Diffuser	6640.51	10160.25
60%	PC Diffuser	5255.05	8581.79
40%	PC Diffuser	3675.80	6089.42

MOUNTING:

The external portable mounting plate makes installation super easy and simple. There's no need to open fixture housing, nor drill on housing, which greatly minimize the risk of water ingress.

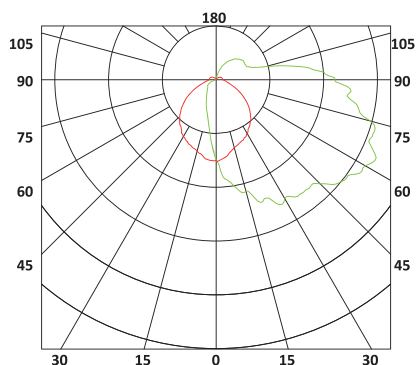
PHOTOMETRIC:


ACCESSORIES (SOLD SEPARATELY) :



Photocell

USE: Photocell is field installed or pre-installed in factory by requesting

SKU: CONT-Photocell



Emergency Battery Backup

Description: It can be pre-installed in factory or field installed

SKU: NUR-OD-BATTERY

ORDERING GUIDE:		SKU: NUR-WP-62W-CCT
FIXTURE	WATTAGE	COLOR TEMPERATURE
NUR-WP		CCT
	62W 100W	