

SPLIT J-BOX LED DOWNLIGHT

Description:

The innovative separable design of junction box and housing makes it more flexible. The split commercial downlight can fulfill a wide range of lighting needs. Easy-fit installation comes from adjustable spring-action housing clips. It is designed and engineered for new construction applications, which is suitable for commercial and public places and elegantly decorates the ambience, such as shopping mall, hospital, airport, hotel lobby, etc.

Features:

- Material: Aluminum haze trim with white trim ring
- Mounting: Recessed
- Simple Installation with spring-action housing clips
- Integrated J-Box for direct wire eliminated recessed can
- Perfect and economic solution for new construction applications.



Applications:

Suitable for commercial and public places and elegantly decorates the ambience, such as:

- Shopping malls
- Hospitals
- Airports
- Hotel lobbies



20W-35000K



**CCT Tunable
3000K/4000K/5000K
10W, 15W, 20W**




**CCT Tunable
3000K/3500K/4000K**

**Wattage Tunable
27W/34W/40W**


Technical Specifications:

Wattage	10W	15W	20W		XXW	
Input Voltage	120-347V	120-347V	120-347V	100-277V	120-347V	
Color Temperature	CCT Adjustable (3000K,4000K, 5000K)	CCT Adjustable (3000K,4000K, 5000K)	CCT Adjustable (3000K,4000K, 5000K)	3500K	3500K	CCT Adjustable (3000K,3500K, 4000K)
Wattage Tunable	—	—	—		27W/ 34W/ 40W	
Lumen Output	700LM	1200LM	1500LM		2700LM/3230LM/ 3600LM	
Trim Options	4",6",8",10"	4",6",8",10"	4",6",8",10"		4",6",8",10"	
CRI	> 80	> 80	> 80		> 80	
Power Factor	> 0.9	> 0.9	> 0.9		> 0.9	
Dimming	0-10V	0-10V	0-10V	—	0-10V	
IP rating	IP20	IP20	IP20		IP20	
Lifespan	35,000 hours	35,000 hours	35,000 hours	50,000 hours	50,000 hours	
Warranty	5 years	5 years	5 years		5 years	

Dimensions:

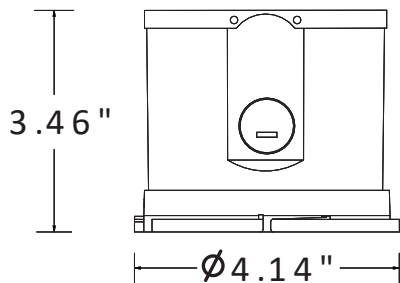

10W IC, 15W IC, 20W NON IC

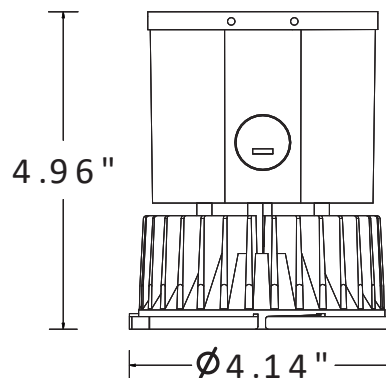

20W IC, 40W NON IC

Ordering Guide: (Split J-Box LED Downlight)

Example: DWN-CPS-D10W-CCT

Series	Dimmable	Wattage	Color Temperature
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
DWN-CPS	D 0-10V Dimmable	10W 15W 20W XXW Wattage Selectable 27W/ 34W/ 40W	CCT* 3500K*





*CCT Selectable: 3000K, 4000K, 5000K for 10W, 15W, 20W light engines.
 *CCT Selectable: 3000K, 3500K, 4000K for Wattage Selectable light engines.
 **3500K is only available for 20W light engines.

Accessories: (Trim Options)



- Round Trim
- Square Trim
- Round Wall Wash Trim
- Square Wall Wash Trim

Trim Dimensions:



Round Trims

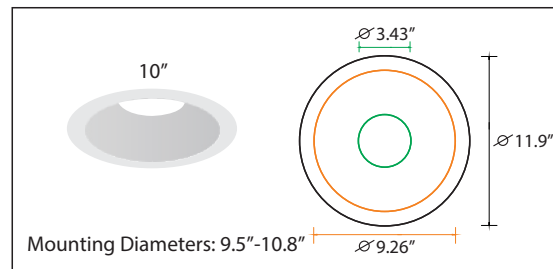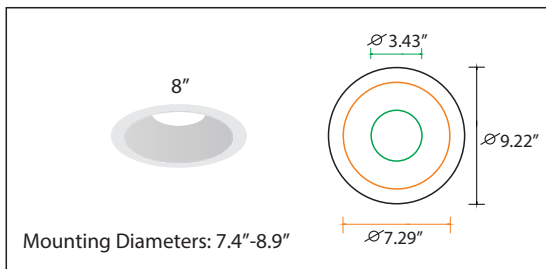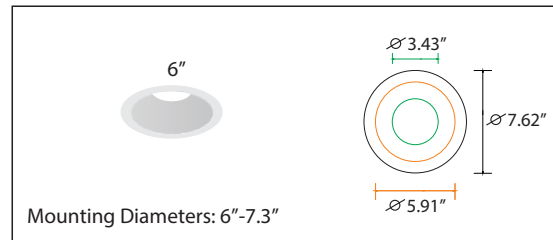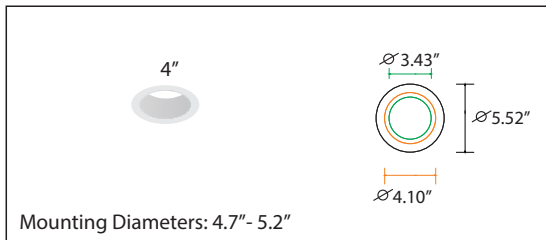



Round Wall Wash Trims

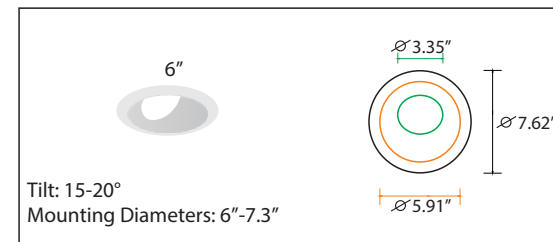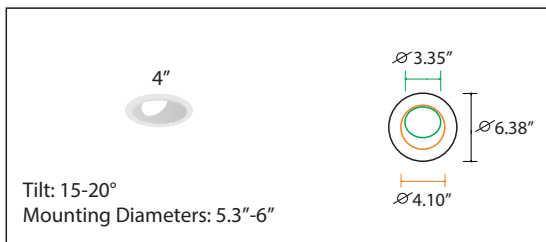

Square Trims

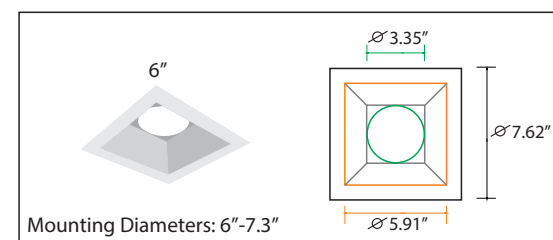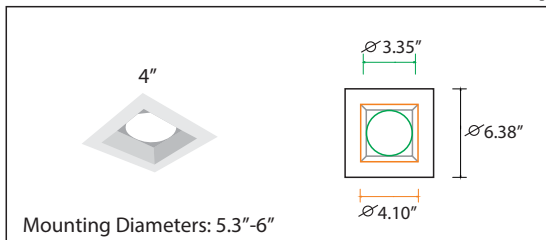




Square Wall Wash Trims

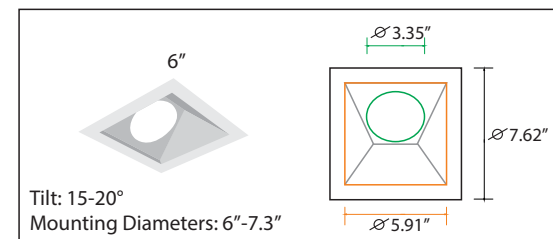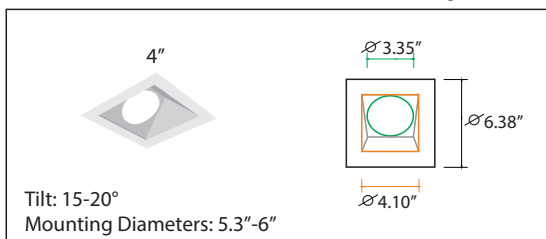

Accessories: (Mounting Options)

- 4" New Construction Frame Kit
- 6" New Construction Frame Kit
- 8" New Construction Frame Kit

New Construction Frame Kits:

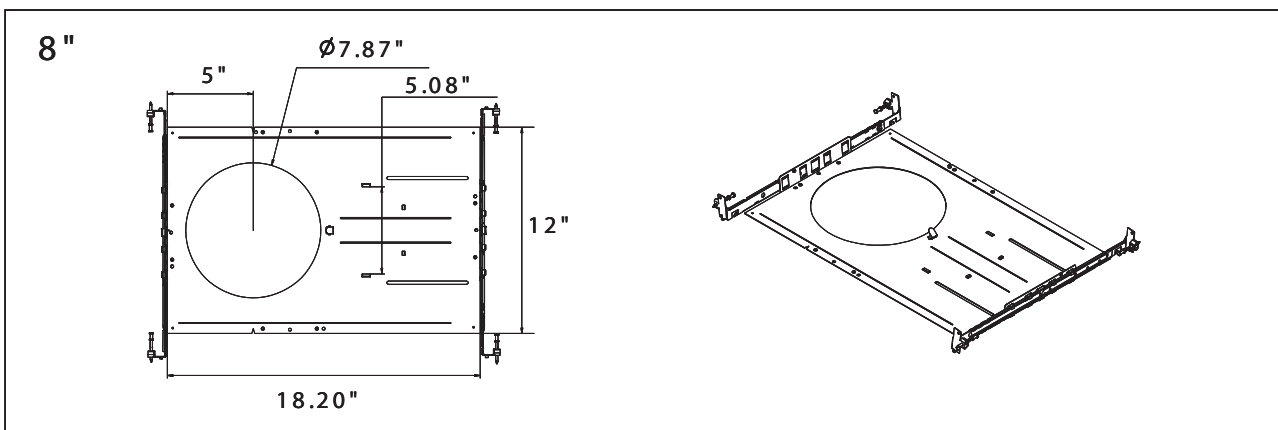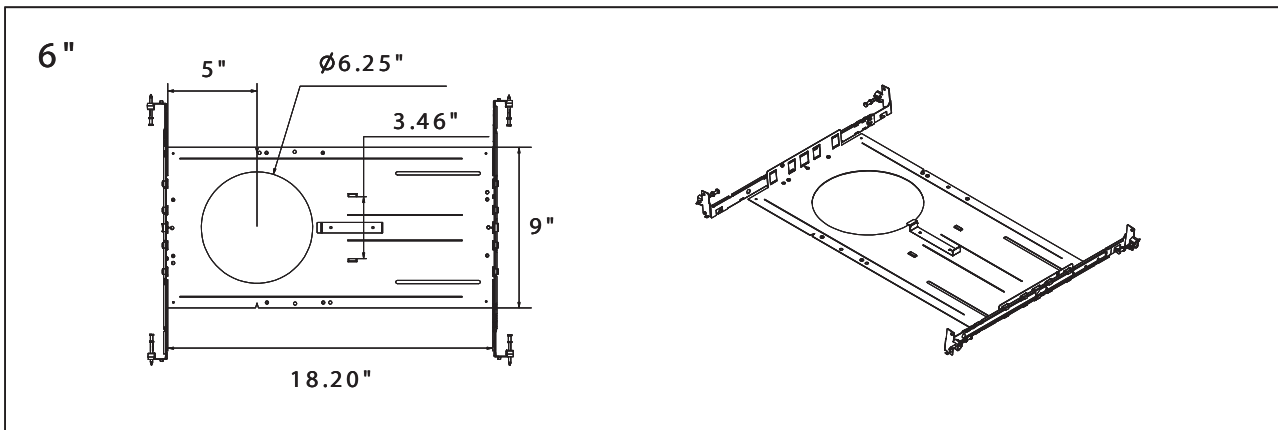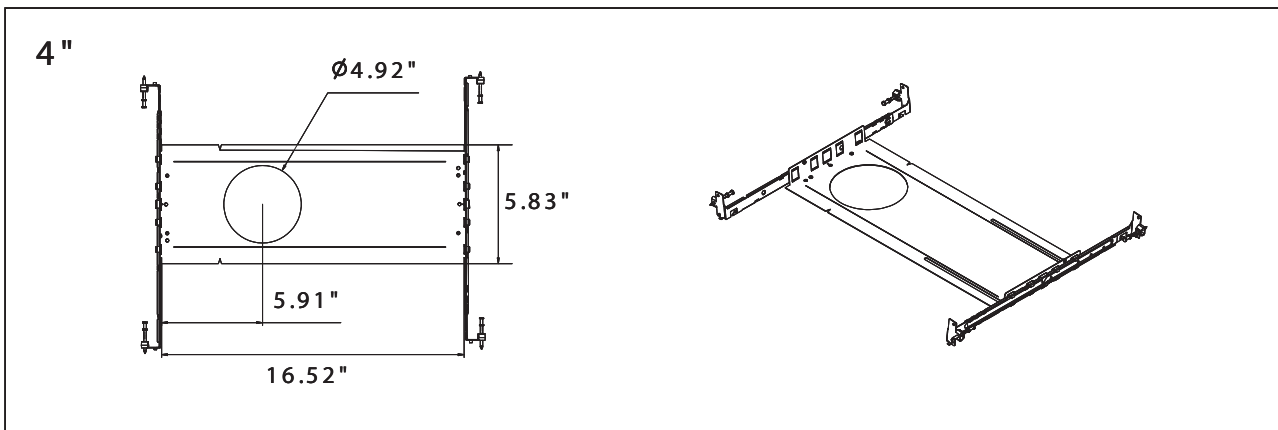



Ordering Guide: (Accessories Trim)

Example: NUR-CP4-Trim-S

Series <input type="text"/>	Type <input type="text"/>	Shape <input type="text"/>
NUR-CP	4-Trim 4" 6-Trim 6" 8-Trim 8" 10-Trim 10"	S Square RWW Round Wall Wash SWW Square Wall Wash R Round

Ordering Guide: (Accessories For Frame Kits)

Example: NUR-CP4-Frame

Series <input type="text"/>	Type <input type="text"/>	Kit <input type="text"/>
NUR-CP	4 4" 6 6" 8 8"	Frame