

Split J-Box LED Downlight – 20W CCT Tunable

Description:

The innovative separable design of junction box and housing makes it more flexible. The split commercial downlight can fulfill a wide range of lighting needs. Easy-fit installation comes from adjustable spring-action housing clips. It is designed and engineered for new construction applications, which is suitable for commercial and public places and elegantly decorates the ambiance, such as shopping mall, hospital, airport, hotel lobby, etc.



Features:

- Material: Aluminum haze trim with white trim ring
- Mounting: Recessed
- Simple Installation with spring-action housing clips
- Integrated J-Box for direct wire eliminated recessed can
- Perfect and economic solution for new construction applications.



Applications:


Suitable for commercial and public places and elegantly decorates the ambiance, such as:

- Shopping malls
- Hospitals
- Airports
- Hotel lobbies

Technical Specifications:

Wattage	20W
Input Voltage	120-347V AC
Color Temperature	CCT Adjustable (3000K,3500K,4000K)
Lumen Output	1500LM
Trim Options	4",6",8",10"
CRI	> 80
Power Factor	> 0.9
Dimming	0-10V
IP Rating	IP20
Lifespan	50,000 hours
Warranty	5 years

Dimensions:

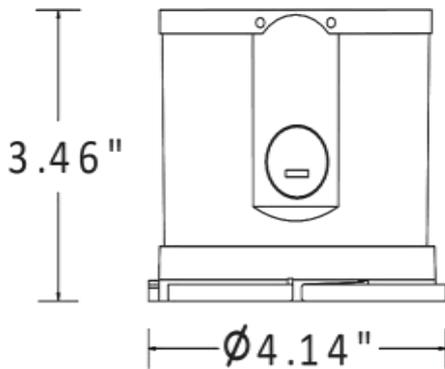

20 W NON-IC





Ordering Guide:

Example: DWN-CPS-D20W-CCT



Type	Dimmable	Wattage	Color Temperature
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DWN-CPS	D 0-10V Dimmable	20W	CCT CCT Adjustable 3000K, 3500K,4000K

Trim Dimensions:



Round Trims

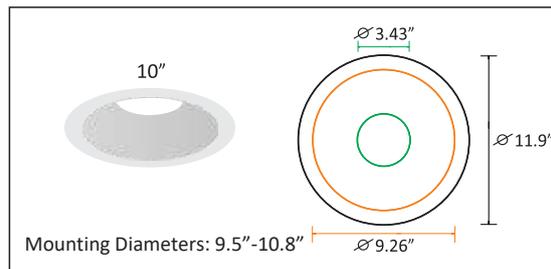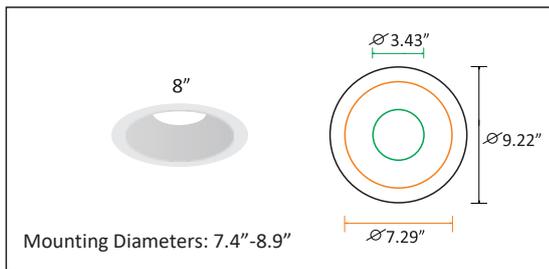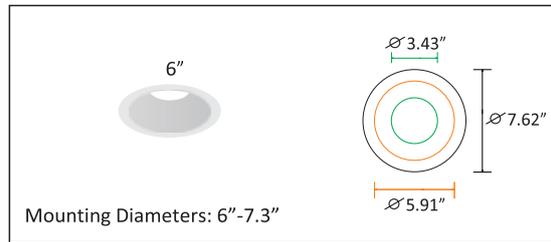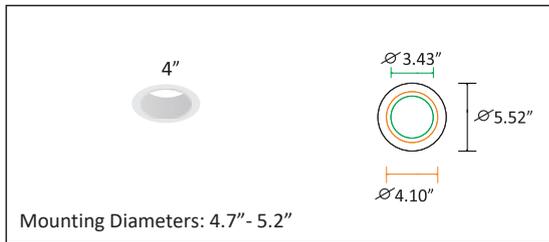



Round Wall Wash Trims

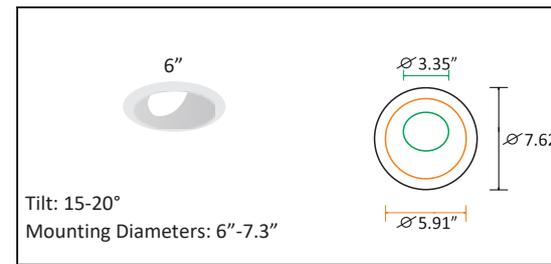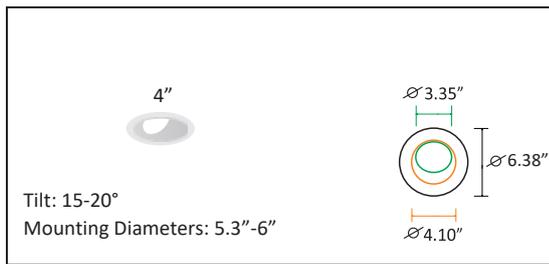

Square Trims

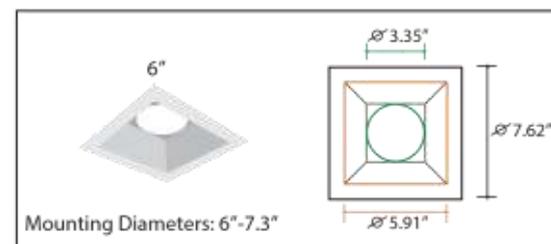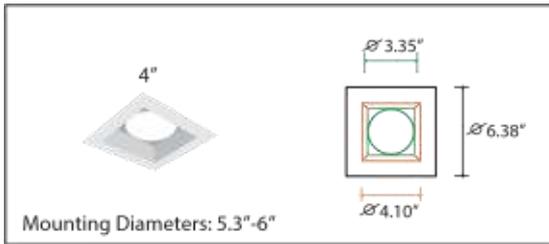

Square Wall Wash Trims


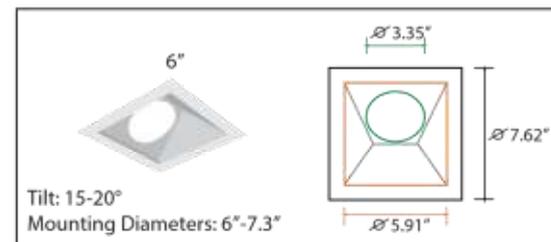
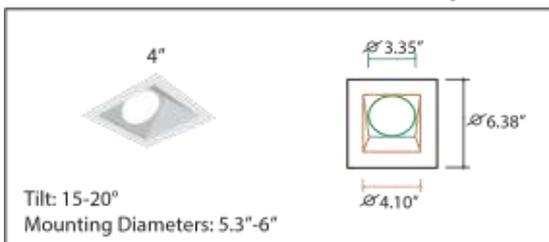


Ordering Guide: (Accessories Trim)

Example: NUR-CP4-Trim-S

Series	Type	Shape
NUR-CP	4-Trim 4" 6-Trim 6" 8-Trim 8" 10-Trim 10"	R Round S Square RWW Round Wall Wash SWW Square Wall Wash

New Construction Rough-In Kits:

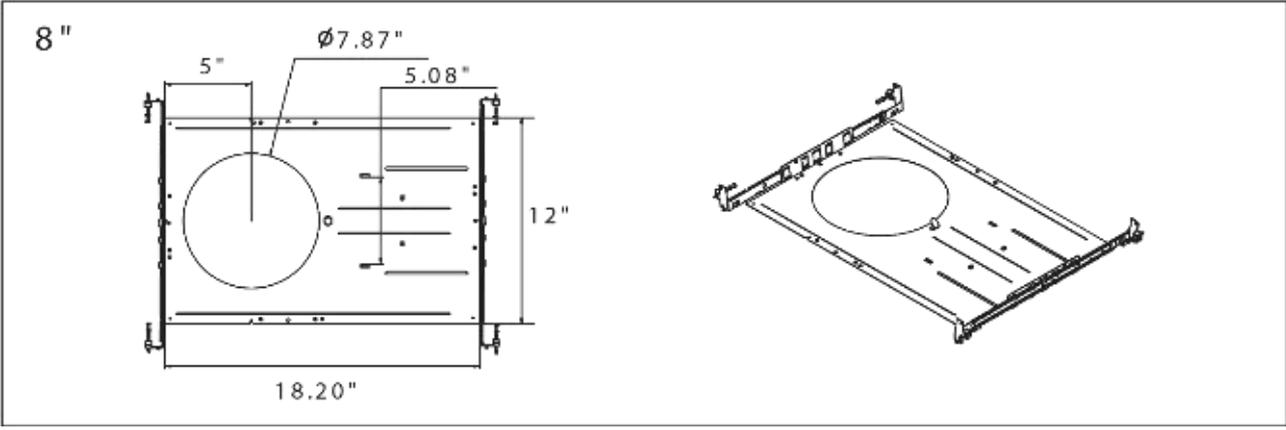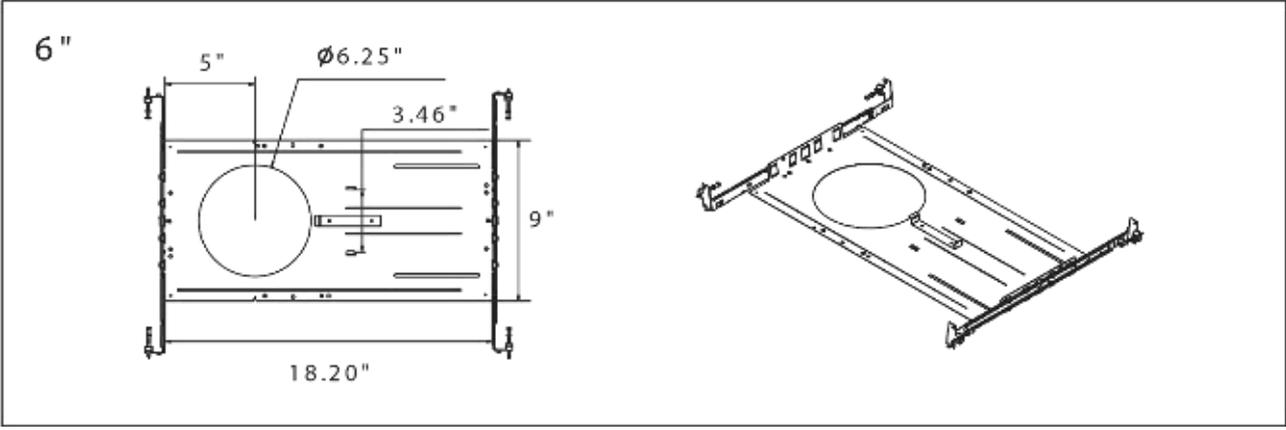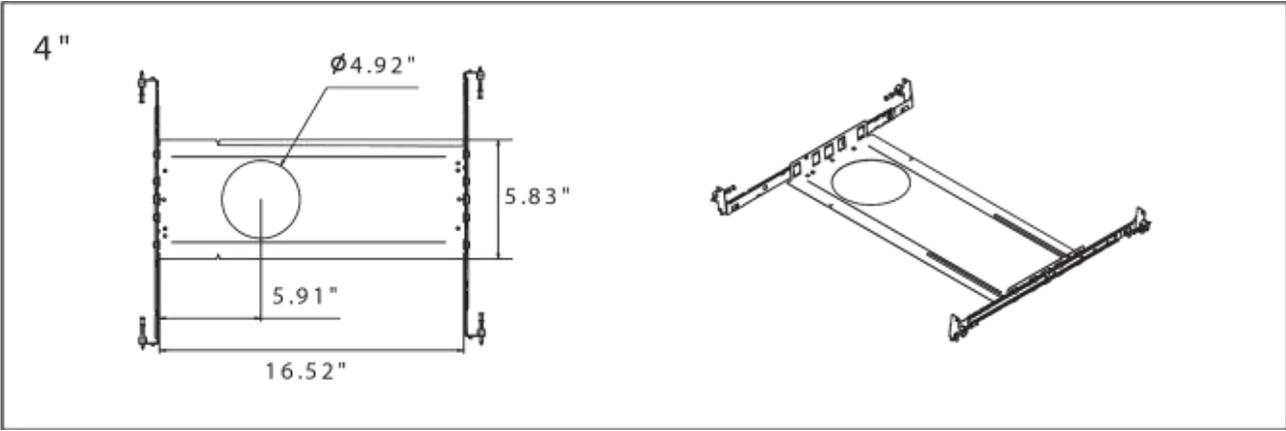



Ordering Guide: (Accessories For Frame Kits) Example: NUR-CP4-Frame

Series <input type="text"/>	Type <input type="text"/>	Frame
NUR-CP	4 4" 6 6" 8 8"	