

# EMERGENCY EXIT SIGN - GREEN OR RED LETTERS

## DESCRIPTION:

Our Emergency Exit Signs are fire emergency lights available in red and green. This 4W exit sign operates on a 1.2 V nickel-cadmium battery with 90 minutes of battery backup time. Its durable, fire-resistant construction makes it suitable for enhanced safety and security purposes. This UL-certified exit sign is ideal for commercial buildings' safety.



## FEATURES:

- Available in Green or Red lettering for clear emergency visibility.
- Durable, fire-resistant ABS housing for long-lasting protection.
- 90-minute battery backup powered by a 1.2V Nickel Cadmium battery.
- Energy-efficient with a maximum power consumption of 4W.
- UL-certified for maintained operation, ensuring reliable performance in emergencies.


## APPLICATIONS:

- Offices
- Factories
- Shopping Malls
- Retail Stores
- Hospitals
- Hotels
- Commercial Buildings
- Schools

## TECHNICAL SPECIFICATIONS:

Material	Injection-molded ABS housing
Operating Mode	Maintained operation
Input Voltage	120/277V, 60Hz
Power Consumption	4W max.
Output	1W max.
Battery	1.2V Nickel Cadmium
Charging Time	24 hours
Discharge Time	90 minutes
Operating Temperature	32°F to 104°F
Certificate	UL Certified
Dimensions	11.6 x 8.18 x 1.57 inches

## DIMENSIONS:

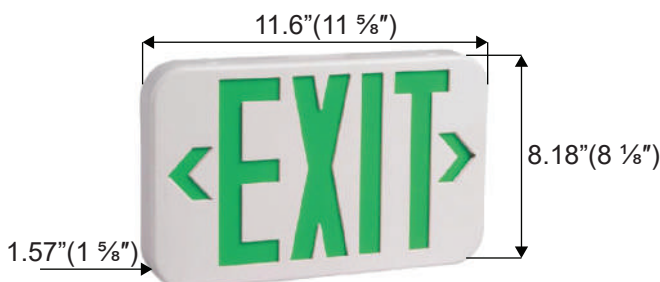



**ORDERING GUIDE:**

SKU: NUR-EXIT-CR7037-G				
Brand	Sign	Model	Color	
NUR	EXIT	CR7037	G R	Green Red