

LED 135W WALL PACK - CCT & POWER SELECTABLE

DESCRIPTION:

Our LED 135W Wall pack is 3CCT Selectable (3000K, 4000K, 5000K) and Power Selectable (100%, 80%, 60%, 40%). With 12 unique settings, it acts as a 12 in 1 fixture with a max power setting of 135-watts. This unit replaces up to a 400-watt metal halide equivalent. It is designed with the ability to house optional features, including Dusk-to-Dawn, Occupancy Sensors, and Internal Battery Backup units (each sold separately).



FEATURES:

- SKU: NUR-WP06-135W-CCT
- Outdoor rated: Sealed die-cast profile for outdoor durability
- Efficient LED heat management for optimal performance and longevity
- Tempered UV-coated flat lenses for superior performance and glare control
- Standard 0-10V dimming 100% to 10% dimming range
- Drivers with >90% power factor
- Optional Dusk-to-Dawn Photocell (sold separately)
- Optional PIR occupancy sensor options (sold separately)
- Optional Battery Backup (sold separately)
- Estimated 50,000-hour LED lifespan (IES LM-80 & TM-21)
- Warranty: Five years


APPLICATIONS:

- Warehouse Exteriors
- Building Facade
- Commercial Building Exteriors

TECHNICAL SPECIFICATIONS:

Input Voltage	120-277 VAC
Color Temperature	3000K, 4000K, 5000K
Max Lumen	15500LM (3K), 16500LM (4K), 16000LM (5K)
Max Wattage	135-watts
Operating Temperature	-40°F to 104°F
Dimming	0-10V

DIMENSIONS:

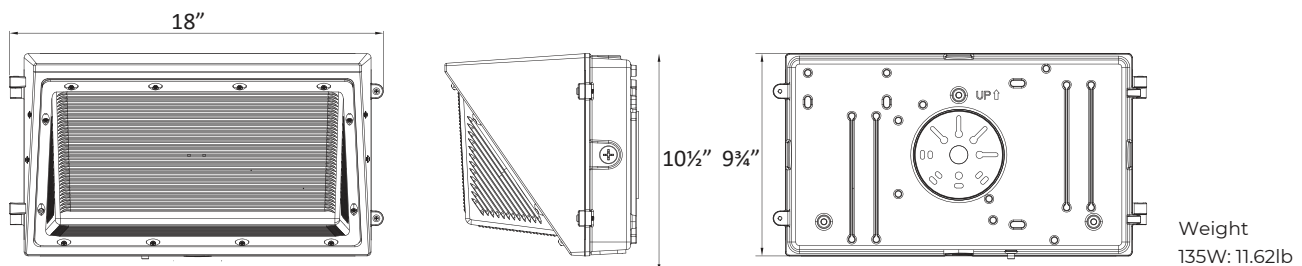

Weight
135W: 11.62lb

CCT AND WATTAGE CONTROLLER:

WATTAGE ADJUSTABLE:

135W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	135W	70	15500lm	119 lm/W	16500lm	130 lm/W	16000lm	123 lm/W
80%	108W	70	12400lm	124 lm/W	13200lm	137 lm/W	12800lm	128 lm/W
60%	81W	70	9300lm	130 lm/W	9900lm	146 lm/W	9600lm	133 lm/W
40%	54W	70	6200lm	135 lm/W	6600lm	152 lm/W	6400lm	139 lm/W

ELECTRICAL DATA:

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1170	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49

ACCESSORIES (OPTIONAL)

SKU: CONT-Photocell

Description: Field installation is available upon request.


SKU: NUR-OD-BATTERY

Description: Field installation is available.